
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 11 mm long

Supplier Part Number: OJASDS4011

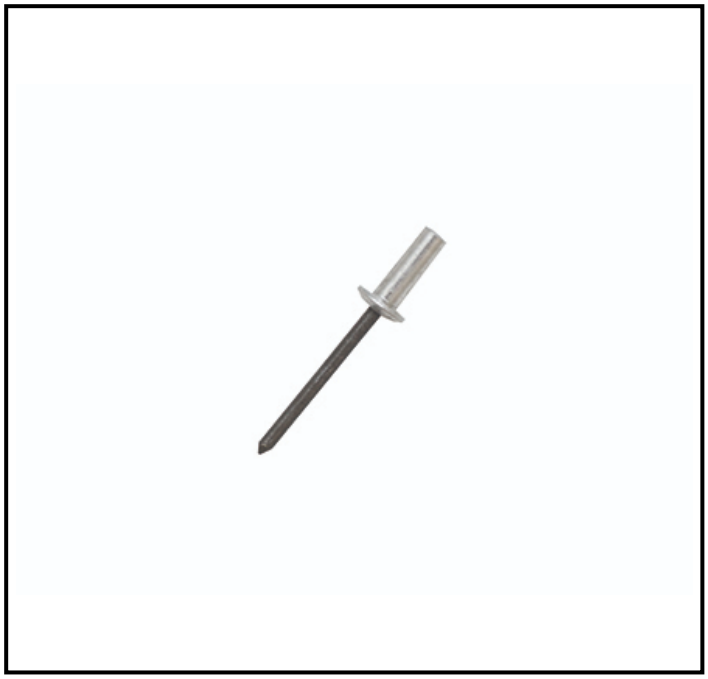

FEATURES

- **Phosphated Finish:** Enhances corrosion resistance and durability.
- **Dome Head Type:** Provides a smooth and aesthetically pleasing finish.
- **Steel Mandrel:** Offers strength and ensures a secure fastening.
- **Maximum Grip Range of 6.5 mm:** Accommodates a variety of material thicknesses.
- **Minimum Grip Range of 4.5 mm:** Ensures versatility in application.
- **Rivet Length of 11 mm:** Suitable for medium thickness materials.
- **Sealed Blind Rivet Type:** Ensures a watertight seal for secure fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4 mm Sealed Blind Rivet is designed for secure fastening in a variety of applications. Made from durable aluminium with a steel mandrel, this rivet provides reliable performance and corrosion resistance. Ideal for use where a watertight seal is required, it is suitable for both indoor and outdoor applications.

General Specifications

Finish	Phosphated
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	6.5 mm
Minimum Grip	4.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	11 mm
Shear Strength	1710 N
Tensile Strength	2240 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

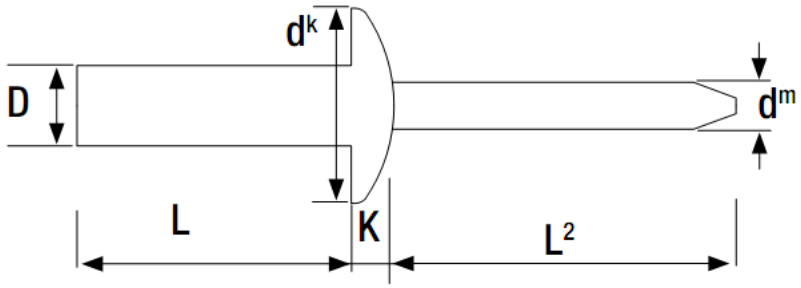



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.5	0.5	2.0	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	8.0	2.0	3.5	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	9.5	3.5	5.0	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	10.5	5.0	6.5	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	12.5	6.5	8.0	3.3	6.0	1.4	1.70	26.0	1070	1245	750
4.0	8.0	1.0	3.5	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	9.5	3.5	5.0	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	11.0	4.5	6.5	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	12.5	6.5	8.0	4.1	8.0	1.7	2.18	27.0	1710	2240	500
	15.0	8.0	10.5	4.1	8.0	1.7	2.18	27.0	1710	2240	500
4.8	8.0	1.0	3.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	9.5	3.0	4.5	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	10.0	3.0	5.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	11.0	4.5	6.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	12.5	6.0	7.5	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	14.0	7.5	9.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	16.0	9.0	11.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	18.0	11.0	13.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	21.0	13.0	16.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	25.0	16.0	20.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.4	12.5	3.0	6.0	6.5	12.7	2.5	3.70	32.0	3950	5000	250
	16.0	6.0	9.0	6.5	12.7	2.5	3.70	32.0	3950	5000	200
	20.0	8.0	12.5	6.5	12.7	2.5	3.70	32.0	3950	5000	150