
FEATURES

- **Sealed Design:** Provides a watertight seal to prevent moisture ingress.
- **Aluminium Body:** Offers corrosion resistance and lightweight strength.
- **Steel Mandrel:** Ensures strong and durable fastening.
- **Phosphated Finish:** Enhances corrosion resistance and durability.
- **Dome Head:** Provides a neat and low-profile finish.
- **Wide Grip Range:** Accommodates material thicknesses from 16 mm to 20 mm.

RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 25 mm long

Supplier Part Number: OJASDS4825

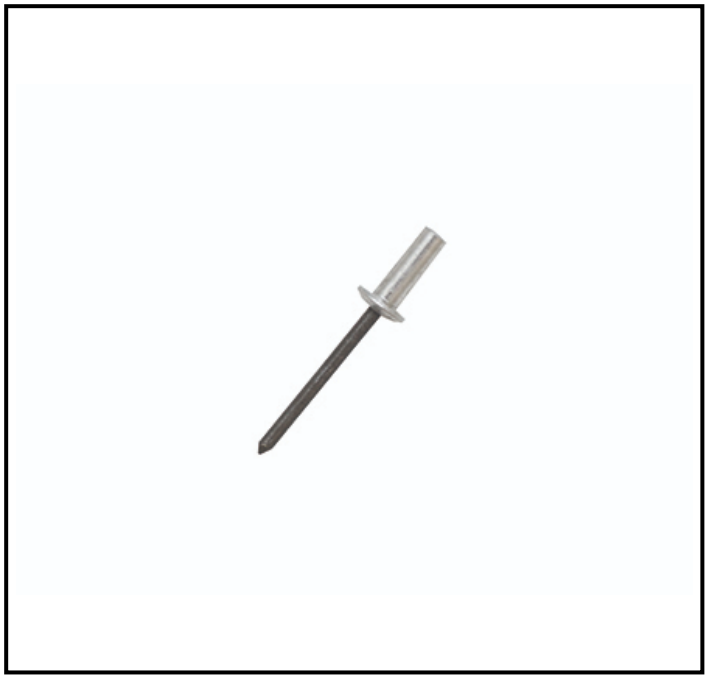

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Sealed Blind Rivet is designed for reliable fastening in applications where a secure and watertight seal is required. With an aluminium body and steel mandrel, this rivet is ideal for joining materials where access is only available from one side. Its sealed design ensures protection against moisture and contaminants, making it suitable for both indoor and outdoor use.

General Specifications

Finish	Phosphated
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	20 mm
Minimum Grip	16 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	25 mm
Shear Strength	2230 N
Tensile Strength	3070 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

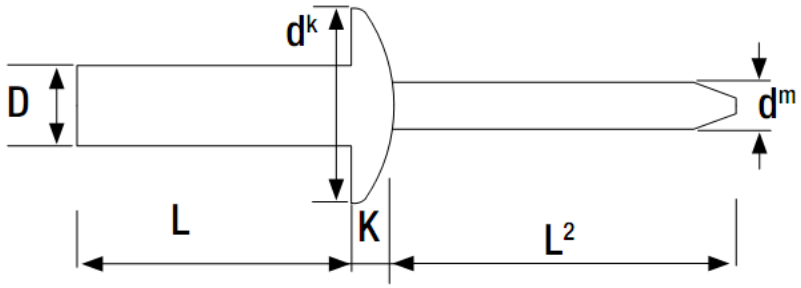



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.5	0.5	2.0	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	8.0	2.0	3.5	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	9.5	3.5	5.0	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	10.5	5.0	6.5	3.3	6.0	1.4	1.70	26.0	1070	1245	1000
	12.5	6.5	8.0	3.3	6.0	1.4	1.70	26.0	1070	1245	750
4.0	8.0	1.0	3.5	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	9.5	3.5	5.0	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	11.0	4.5	6.5	4.1	8.0	1.7	2.18	27.0	1710	2240	750
	12.5	6.5	8.0	4.1	8.0	1.7	2.18	27.0	1710	2240	500
	15.0	8.0	10.5	4.1	8.0	1.7	2.18	27.0	1710	2240	500
4.8	8.0	1.0	3.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	9.5	3.0	4.5	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	10.0	3.0	5.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	11.0	4.5	6.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	12.5	6.0	7.5	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	14.0	7.5	9.0	4.9	9.5	2.0	2.63	28.0	2230	3070	500
	16.0	9.0	11.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	18.0	11.0	13.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	21.0	13.0	16.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250
	25.0	16.0	20.0	4.9	9.5	2.0	2.63	28.0	2230	3070	250

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.4	12.5	3.0	6.0	6.5	12.7	2.5	3.70	32.0	3950	5000	250
	16.0	6.0	9.0	6.5	12.7	2.5	3.70	32.0	3950	5000	200
	20.0	8.0	12.5	6.5	12.7	2.5	3.70	32.0	3950	5000	150