
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3 mm Diameter x 8 mm long

Supplier Part Number: OJASK3008

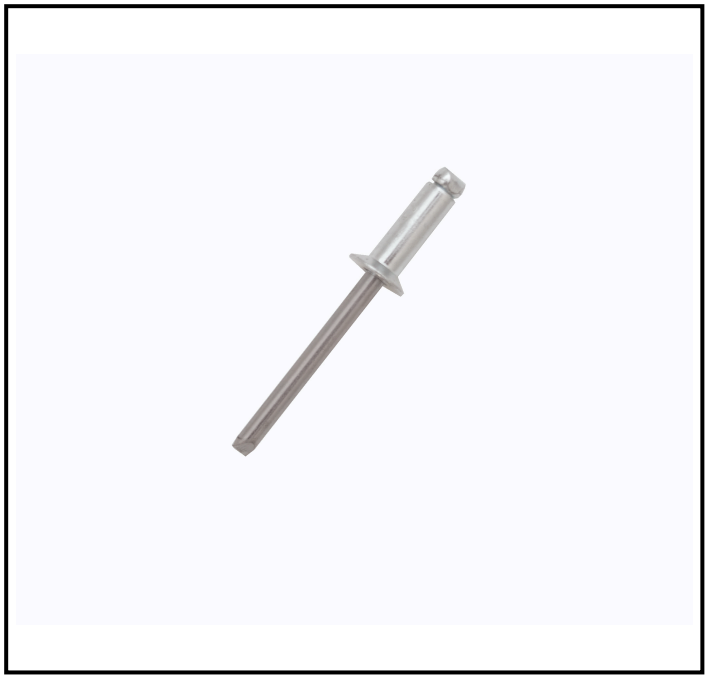

FEATURES

- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant fastening
- **Mandrel Material:** Steel for enhanced strength and durability
- **Head Type:** Countersunk for a flush finish
- **Finish:** Trivalent Chromate Zinc for additional corrosion protection
- **Rivet Diameter:** 3 mm for precise fitment
- **Rivet Length:** 8 mm suitable for a range of material thicknesses
- **Maximum Grip:** 5 mm for versatile application
- **Minimum Grip:** 3.5 mm for secure fastening
- **Fixing Hole Diameter:** 3.1 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This aluminium blind rivet features a steel mandrel, providing a strong and reliable connection. Ideal for use where access is only available from one side, it ensures efficient assembly and maintenance.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	8 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

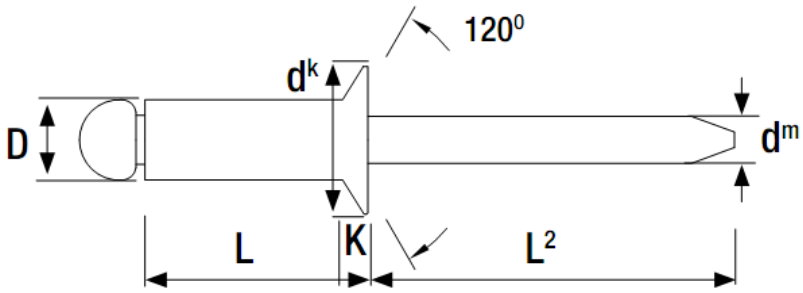



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	6.0	1.5	3.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
3.0	6.0	1.5	3.5	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.5	5.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
3.2	6.0	1.5	3.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	14.0	9.0	10.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	16.0	10.5	12.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	18.0	12.5	14.5	3.3	6.0	1.1	1.95	26.0	760	980	700