
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3 mm Diameter x 10 mm long

Supplier Part Number: OJASK3010

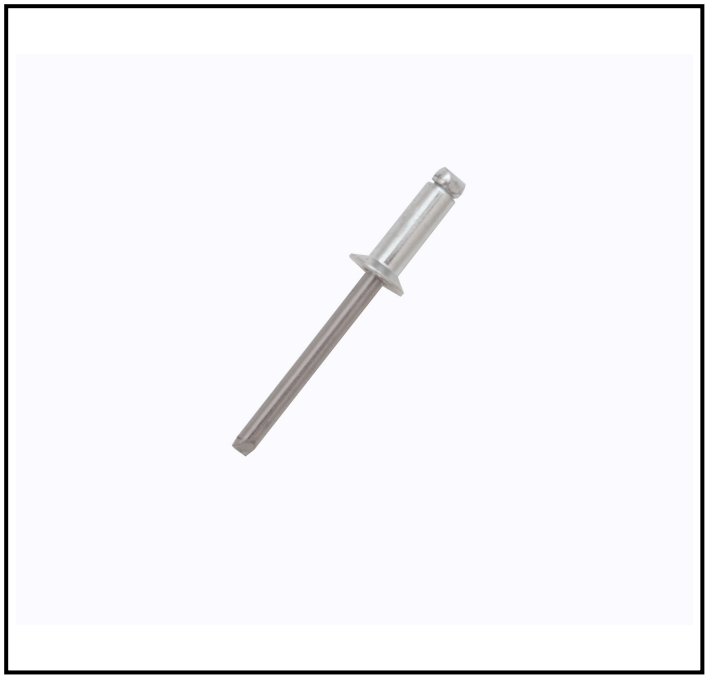

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant fastening.
- **Steel Mandrel:** Provides strong and reliable installation.
- **Countersunk Head:** Allows for a flush finish with the surface.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.
- **3.1 mm Fixing Hole Diameter:** Ensures compatibility with standard drill sizes.
- **5.5 mm to 7 mm Grip Range:** Suitable for a variety of material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 3 mm diameter and a 10 mm length, this rivet is ideal for joining materials where access is only available from one side. The aluminium body ensures lightweight durability, while the steel mandrel provides strength during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	7 mm
Minimum Grip	5.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	10 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

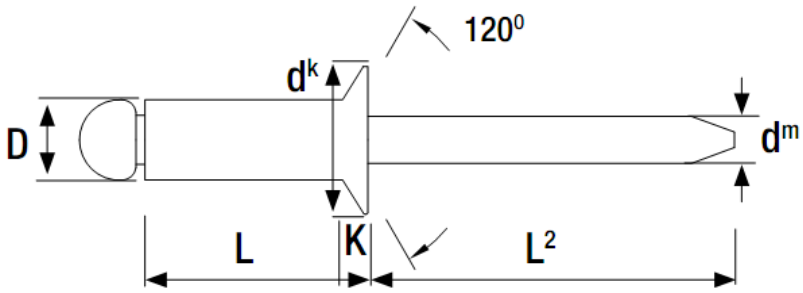



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	6.0	1.5	3.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
3.0	6.0	1.5	3.5	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.5	5.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
3.2	6.0	1.5	3.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	14.0	9.0	10.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	16.0	10.5	12.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	18.0	12.5	14.5	3.3	6.0	1.1	1.95	26.0	760	980	700