
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3 mm Diameter x 12 mm long

Supplier Part Number: OJASK3012

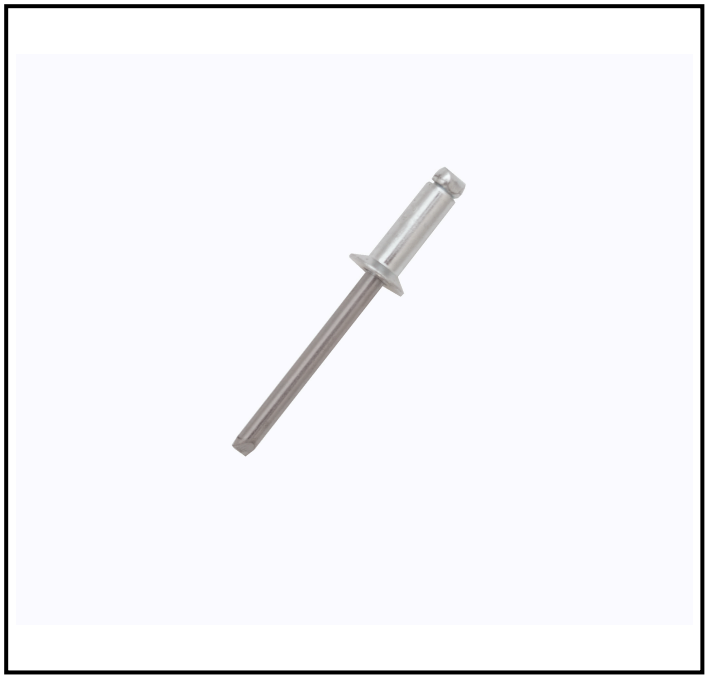

FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides additional strength and durability during installation.
- **Countersunk Head:** Ensures a flush finish for a neat appearance.
- **3 mm Diameter:** Suitable for a range of applications requiring precise fastening.
- **12 mm Length:** Accommodates materials with a grip range of 7 mm to 9 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for long-lasting performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3 mm Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a robust aluminium body and steel mandrel, it provides reliable performance in environments where strength and durability are crucial. Ideal for applications requiring a clean and flush finish, this rivet ensures a strong hold with minimal effort.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	9 mm
Minimum Grip	7 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	12 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

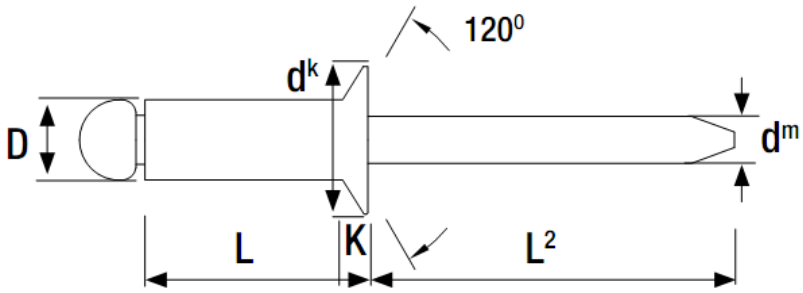



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	6.0	1.5	3.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
3.0	6.0	1.5	3.5	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.5	5.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
3.2	6.0	1.5	3.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	14.0	9.0	10.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	16.0	10.5	12.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	18.0	12.5	14.5	3.3	6.0	1.1	1.95	26.0	760	980	700