
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3.2 mm Diameter x 16 mm long

Supplier Part Number: OJASK3216

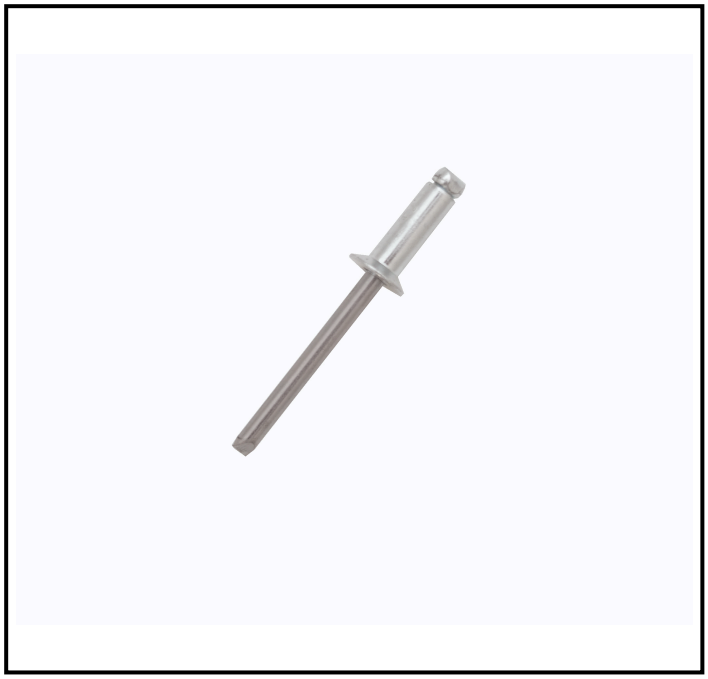

FEATURES

- **Aluminium Body:** Provides a lightweight yet strong fastening solution.
- **Steel Mandrel:** Ensures robust installation and increased durability.
- **Blind Rivet Design:** Allows for installation when access is restricted to one side.
- **3.2 mm Diameter:** Suitable for a range of standard applications.
- **16 mm Length:** Accommodates materials with a grip range of 10.5 mm to 12.5 mm.
- **Countersunk Head:** Offers a flush finish for a neat appearance.
- **Trivalent Chromate Finish:** Provides enhanced corrosion resistance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a lightweight aluminium body and a steel mandrel, this rivet offers reliable performance and ease of installation. Ideal for situations where access is only possible from one side, it ensures a strong and durable connection.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	12.5 mm
Minimum Grip	10.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	16 mm
Shear Strength	760 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

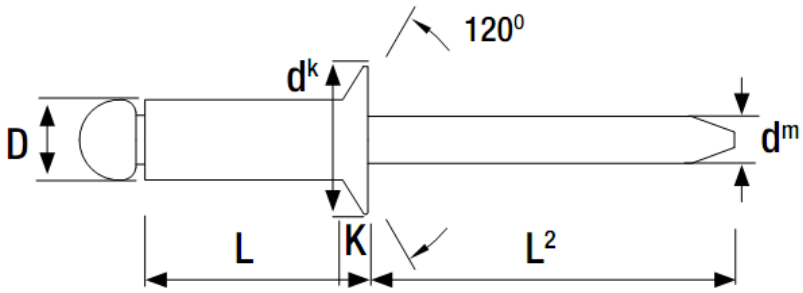



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	6.0	1.5	3.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.8	1.40	26.0	315	355	1000
3.0	6.0	1.5	3.5	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.5	5.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
3.2	6.0	1.5	3.0	3.1	6.0	1.1	1.75	26.0	620	810	1000
	8.0	3.0	5.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.0	1.1	1.95	26.0	760	980	1000
	14.0	9.0	10.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	16.0	10.5	12.5	3.3	6.0	1.1	1.95	26.0	760	980	1000
	18.0	12.5	14.5	3.3	6.0	1.1	1.95	26.0	760	980	700