
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 25 mm long

Supplier Part Number: OJASK4825

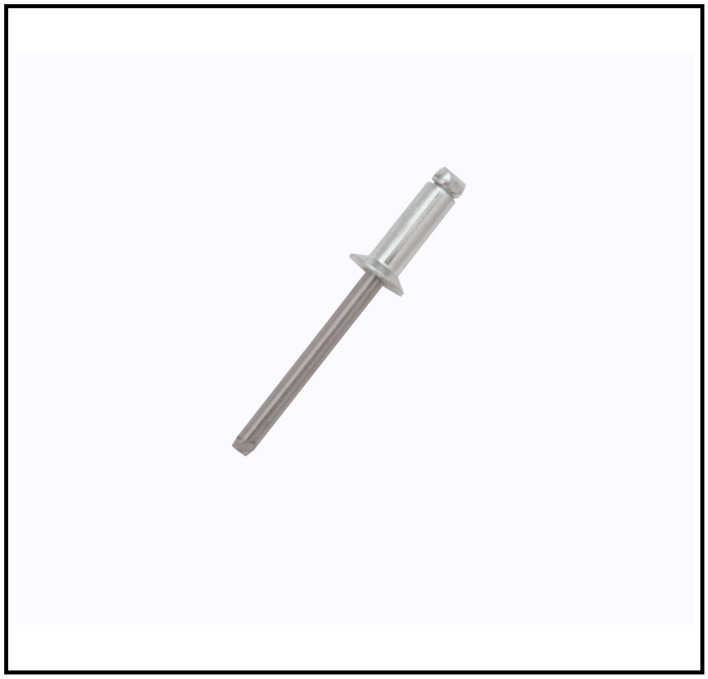

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 25 mm suitable for a range of material thicknesses
- **Head Type:** Countersunk for a flush finish
- **Mandrel Material:** Steel for enhanced strength and reliability
- **Rivet Body Material:** Aluminium for lightweight and corrosion resistance
- **Maximum Grip:** 20 mm accommodating thicker materials
- **Minimum Grip:** 17 mm for versatility in application
- **Finish:** Clear Trivalent Chromate Zinc for added corrosion protection

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a rivet diameter of 4.8 mm and a length of 25 mm, it is ideal for joining materials where access is only available from one side. The aluminium body ensures lightweight durability, while the steel mandrel provides robust support.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	20 mm
Minimum Grip	17 mm


Mechanical Specifications


Head Diameter	9 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	25 mm
Shear Strength	1700 N
Tensile Strength	2250 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

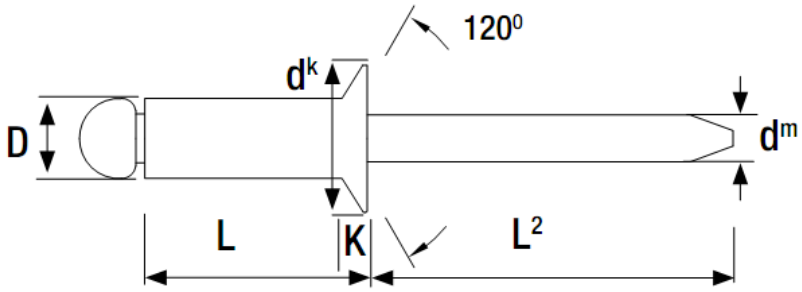



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.0	2.0	4.1	7.5	1.4	2.10	27.0	1200	1600	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.10	27.0	1200	1600	750
	10.0	4.0	6.0	4.1	7.5	1.4	2.10	27.0	1200	1600	750
	12.0	6.0	8.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	14.0	8.0	10.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	20.0	14.0	16.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
4.8	6.0	1.5	2.0	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	8.0	1.5	3.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	18.0	11.0	13.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	20.0	13.0	15.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	22.0	15.0	17.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	25.0	17.0	20.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	30.0	20.0	24.5	4.9	9.0	1.8	2.70	28.0	1700	2250	200
	35.0	24.0	29.0	4.9	9.0	1.8	2.70	28.0	1700	2250	150