
# RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 30 mm long

Supplier Part Number: OJASK4830

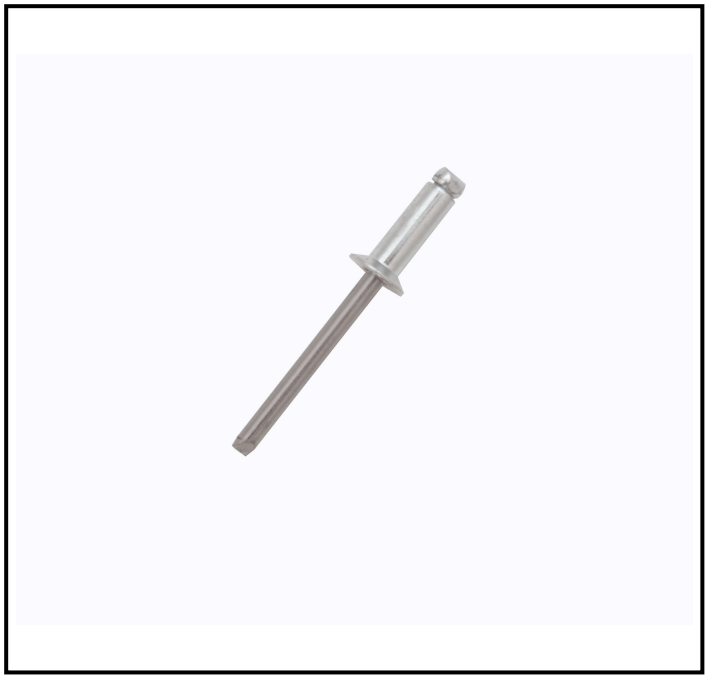

## FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting
- **Rivet Length:** 30 mm suitable for a range of material thicknesses
- **Head Type:** Countersunk for a flush finish
- **Mandrel Material:** Steel for enhanced durability
- **Finish:** Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 24.5 mm accommodating thicker materials
- **Minimum Grip:** 20 mm ensuring versatility in applications

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. This rivet is ideal for joining materials with varying thicknesses, providing a strong and reliable hold.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Countersunk |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 24.5 mm |
| Minimum Grip | 20 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 30 mm |
| Shear Strength | 1700 N |
| Tensile Strength | 2250 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

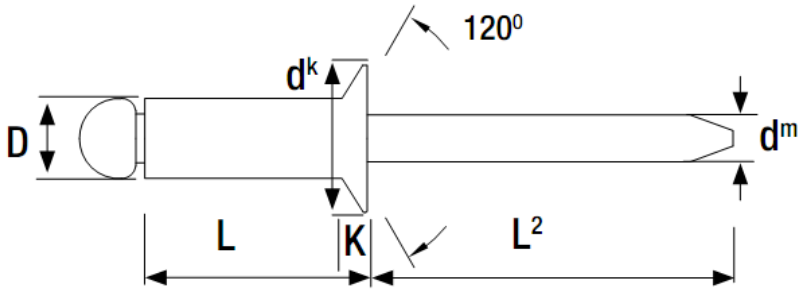

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.0 | 6.0 | 1.0 | 2.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 1000 |
| | 8.0 | 2.0 | 4.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 750 |
| | 10.0 | 4.0 | 6.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 750 |
| | 12.0 | 6.0 | 8.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 14.0 | 8.0 | 10.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 16.0 | 10.0 | 12.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 18.0 | 12.0 | 14.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 20.0 | 14.0 | 16.0 | 4.1 | 7.5 | 1.4 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| 4.8 | 6.0 | 1.5 | 2.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 8.0 | 1.5 | 3.5 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 10.0 | 3.5 | 5.5 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 12.0 | 5.5 | 7.5 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 14.0 | 7.5 | 9.5 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 16.0 | 9.0 | 11.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 18.0 | 11.0 | 13.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 20.0 | 13.0 | 15.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 22.0 | 15.0 | 17.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 25.0 | 17.0 | 20.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 30.0 | 20.0 | 24.5 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 200 |
| | 35.0 | 24.0 | 29.0 | 4.9 | 9.0 | 1.8 | 2.70 | 28.0 | 1700 | 2250 | 150 |