
RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 35 mm long

Supplier Part Number: OJASK4835

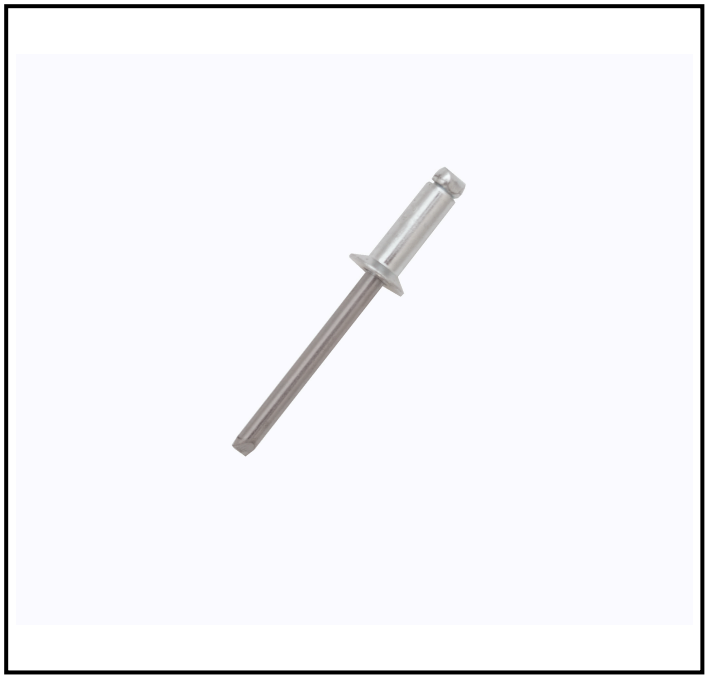

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 35 mm suitable for a wide range of material thicknesses
- **Head Type:** Countersunk for a flush finish with the surface
- **Mandrel Material:** Steel for enhanced strength and durability
- **Rivet Body Material:** Aluminium for lightweight and corrosion resistance
- **Maximum Grip:** 29 mm accommodating thicker materials
- **Minimum Grip:** 24 mm ensuring versatility in application
- **Finish:** Clear Trivalent Chromate Zinc for added corrosion protection

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 4.8 mm Aluminium Blind Rivet designed for secure fastening in various industrial applications. This blind rivet is ideal for situations where only one side of the workpiece is accessible, providing a reliable and durable connection.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	29 mm
Minimum Grip	24 mm


Mechanical Specifications


Head Diameter	9 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	35 mm
Shear Strength	1700 N
Tensile Strength	2250 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

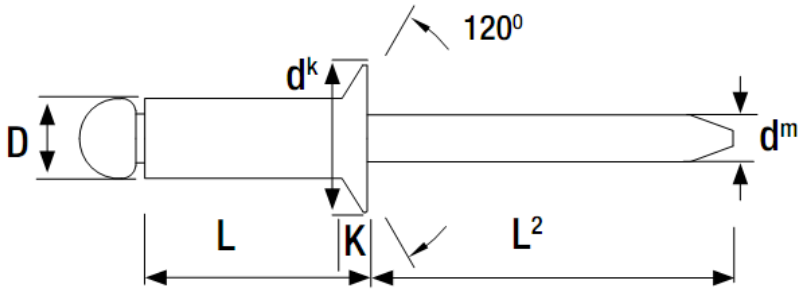



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.0	2.0	4.1	7.5	1.4	2.10	27.0	1200	1600	1000
	8.0	2.0	4.0	4.1	7.5	1.4	2.10	27.0	1200	1600	750
	10.0	4.0	6.0	4.1	7.5	1.4	2.10	27.0	1200	1600	750
	12.0	6.0	8.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	14.0	8.0	10.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	16.0	10.0	12.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	18.0	12.0	14.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
	20.0	14.0	16.0	4.1	7.5	1.4	2.10	27.0	1200	1600	500
4.8	6.0	1.5	2.0	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	8.0	1.5	3.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	10.0	3.5	5.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	12.0	5.5	7.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	14.0	7.5	9.5	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	16.0	9.0	11.0	4.9	9.0	1.8	2.70	28.0	1700	2250	500
	18.0	11.0	13.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	20.0	13.0	15.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	22.0	15.0	17.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	25.0	17.0	20.0	4.9	9.0	1.8	2.70	28.0	1700	2250	250
	30.0	20.0	24.5	4.9	9.0	1.8	2.70	28.0	1700	2250	200
	35.0	24.0	29.0	4.9	9.0	1.8	2.70	28.0	1700	2250	150