RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3.2 mm Diameter x 10 mm long

Supplier Part Number: OJASKM3210



FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides robust support during installation.
- **Blind Rivet Design:** Allows for installation from one side, ideal for inaccessible areas.
- **Countersunk Head:** Ensures a flush finish for a neat appearance.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer lifespan.
- **Wide Grip Range:** Accommodates material thicknesses from 2.5 mm to 6.4 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. With a 3.2 mm diameter and 10 mm length, it provides a reliable solution for joining materials with varying thicknesses. The aluminium body ensures lightweight durability, making it ideal for both industrial and commercial use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	6.4 mm
Minimum Grip	2.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	10 mm
Shear Strength	680 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

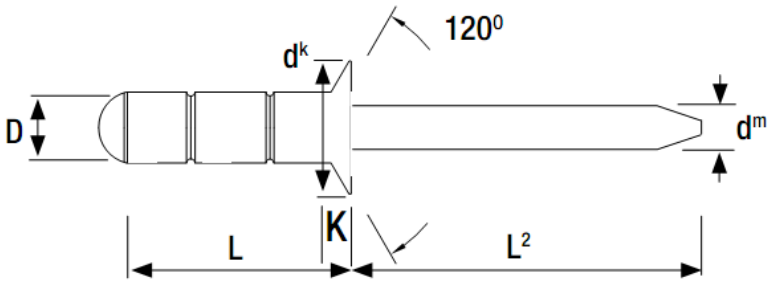



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	2.5	6.4	3.3	6.0	1.1	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.1	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.1	1.78	26.0	680	980	1000
	16.0	8.5	12.5	3.3	6.0	1.1	1.78	26.0	680	980	750
4.0	8.0	1.5	4.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	11.3	2.5	7.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	16.0	7.0	12.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
	20.0	11.0	16.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	12.0	2.0	7.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250
	22.0	12.0	17.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250