RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 3.2 mm Diameter x 12 mm long

Supplier Part Number: OJASKM3212



FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Provides strong support and ensures a secure fastening.
- **Countersunk Head:** Allows for a flush finish, improving the aesthetic of the assembly.
- **Trivalent Chromate Finish:** Enhances corrosion resistance, extending the lifespan of the rivet.
- **Wide Grip Range:** Accommodates material thicknesses from 4.5 mm to 9 mm, offering versatility in application.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality aluminium blind rivet designed for secure and reliable fastening in various industrial applications. With a 3.2 mm diameter and 12 mm length, this rivet is ideal for joining materials where access is only available from one side. Its aluminium body ensures lightweight durability, while the steel mandrel provides robust support during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	9 mm
Minimum Grip	4.5 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	12 mm
Shear Strength	680 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

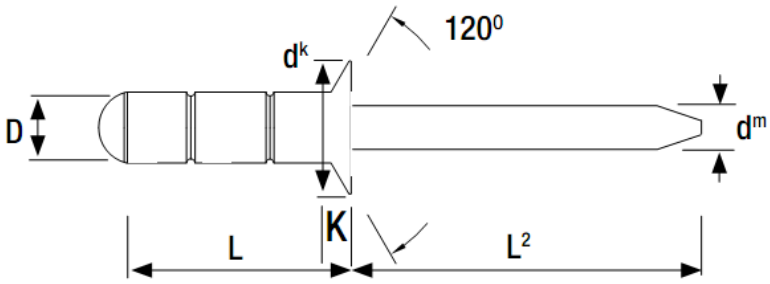



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	2.5	6.4	3.3	6.0	1.1	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.1	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.1	1.78	26.0	680	980	1000
	16.0	8.5	12.5	3.3	6.0	1.1	1.78	26.0	680	980	750
4.0	8.0	1.5	4.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	11.3	2.5	7.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	16.0	7.0	12.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
	20.0	11.0	16.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	12.0	2.0	7.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250
	22.0	12.0	17.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250