RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4 mm Diameter x 11.3 mm long

Supplier Part Number: OJASKM4011



FEATURES

- **Rivet Diameter:** 4 mm for precise and secure fastening
- **Rivet Length:** 11.3 mm to accommodate a range of material thicknesses
- **Head Type:** Countersunk for a flush finish
- **Mandrel Material:** Steel for added strength and durability
- **Rivet Body Material:** Aluminium for lightweight and corrosion resistance
- **Maximum Grip:** 7.5 mm to suit various application needs
- **Minimum Grip:** 2.5 mm for versatility in different materials
- **Finish:** Clear Trivalent Chromate Zinc for enhanced corrosion protection

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality aluminium blind rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side of the workpiece. Its robust construction ensures reliable performance and durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	7.5 mm
Minimum Grip	2.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	11.3 mm
Shear Strength	1150 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

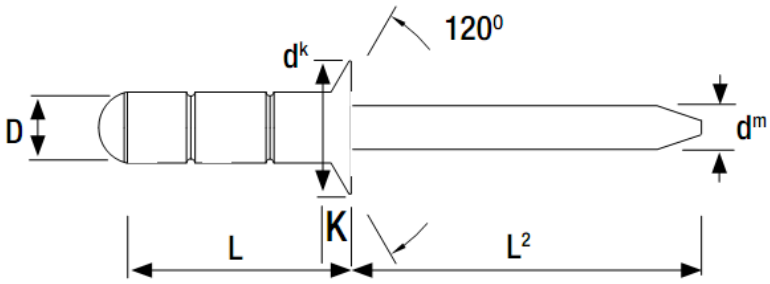



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	2.5	6.4	3.3	6.0	1.1	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.1	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.1	1.78	26.0	680	980	1000
	16.0	8.5	12.5	3.3	6.0	1.1	1.78	26.0	680	980	750
4.0	8.0	1.5	4.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	11.3	2.5	7.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	16.0	7.0	12.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
	20.0	11.0	16.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	12.0	2.0	7.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250
	22.0	12.0	17.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250