RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 10 mm long

Supplier Part Number: OJASKM4810



FEATURES

- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant performance
- **Mandrel Material:** Steel for enhanced strength and durability
- **Head Type:** Countersunk for a flush finish with the surface
- **Finish:** Trivalent Chromate Zinc for additional corrosion resistance
- **Rivet Diameter:** 4.8 mm for compatibility with a range of hole sizes
- **Rivet Length:** 10 mm suitable for materials with varying thickness
- **Grip Range:** 1 mm to 5 mm for versatile application
- **Fixing Hole Diameter:** 4.9 mm for precise fitment
- **Standards:** Complies with DIN 7337 and multiple ISO standards ensuring quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality aluminium blind rivet designed for secure fastening in various industrial applications. This blind rivet is ideal for situations where access is only available from one side of the workpiece, providing a reliable and durable fastening solution.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	5 mm
Minimum Grip	1 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	10 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

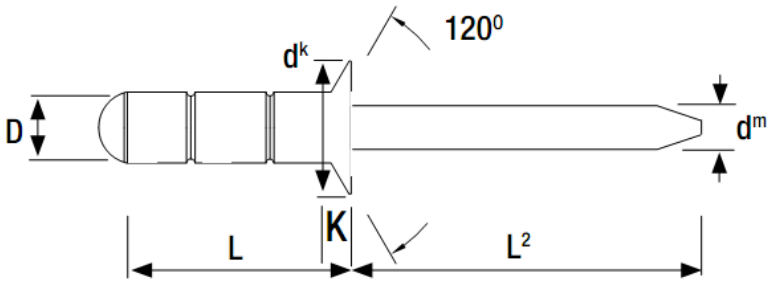



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	2.5	6.4	3.3	6.0	1.1	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.1	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.1	1.78	26.0	680	980	1000
	16.0	8.5	12.5	3.3	6.0	1.1	1.78	26.0	680	980	750
4.0	8.0	1.5	4.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	11.3	2.5	7.5	4.1	8.0	1.4	2.18	27.0	1150	1600	750
	16.0	7.0	12.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
	20.0	11.0	16.0	4.1	8.0	1.4	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	12.0	2.0	7.0	4.9	9.5	1.8	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250
	22.0	12.0	17.0	4.9	9.5	1.8	2.78	28.0	1500	2350	250