# RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 17 mm long

Supplier Part Number: OJASKM4817



## FEATURES

- **Aluminium Body:** Offers a lightweight and corrosion-resistant fastening solution.
- **Steel Mandrel:** Provides high tensile strength for reliable installation.
- **Blind Rivet Design:** Allows for installation where access is limited to one side.
- **Countersunk Head:** Ensures a flush finish for a neat appearance.
- **Wide Grip Range:** Accommodates material thicknesses from 7 mm to 12 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer-lasting performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in a variety of applications. These rivets are ideal for use where access is only available from one side of the workpiece. The aluminium body ensures a lightweight yet durable solution, while the steel mandrel provides strength during installation.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Countersunk |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 12 mm |
| Minimum Grip | 7 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 17 mm |
| Shear Strength | 1500 N |
| Tensile Strength | 2350 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

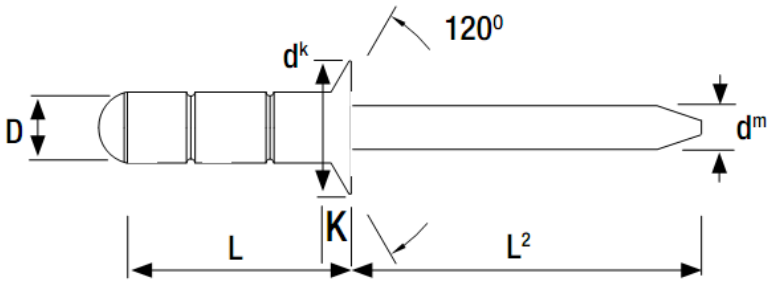

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 3.2 | 10.0 | 2.5 | 6.4 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 1000 |
| | 12.0 | 4.5 | 9.0 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 750 |
| | 14.0 | 6.5 | 10.5 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 1000 |
| | 16.0 | 8.5 | 12.5 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 750 |
| 4.0 | 8.0 | 1.5 | 4.5 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 750 |
| | 11.3 | 2.5 | 7.5 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 750 |
| | 16.0 | 7.0 | 12.0 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 500 |
| | 20.0 | 11.0 | 16.0 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 500 |
| 4.8 | 10.0 | 1.0 | 5.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 500 |
| | 12.0 | 2.0 | 7.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 500 |
| | 17.0 | 7.0 | 12.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 250 |
| | 22.0 | 12.0 | 17.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 250 |