# RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 22 mm long

Supplier Part Number: OJASKM4822



## FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting use.
- **Steel Mandrel:** Provides strength and ensures a secure fastening.
- **Blind Rivet Design:** Allows for installation where access is restricted to one side.
- **Countersunk Head:** Offers a flush finish for a neat appearance.
- **Wide Grip Range:** Accommodates material thicknesses from 12 mm to 17 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality 4.8 mm Aluminium Blind Rivet designed for secure and efficient fastening in various applications. With a robust aluminium body and steel mandrel, this rivet ensures reliable performance and durability. Ideal for use where access is only available from one side, providing a strong and permanent joint.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Countersunk |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 17 mm |
| Minimum Grip | 12 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 22 mm |
| Shear Strength | 1500 N |
| Tensile Strength | 2350 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

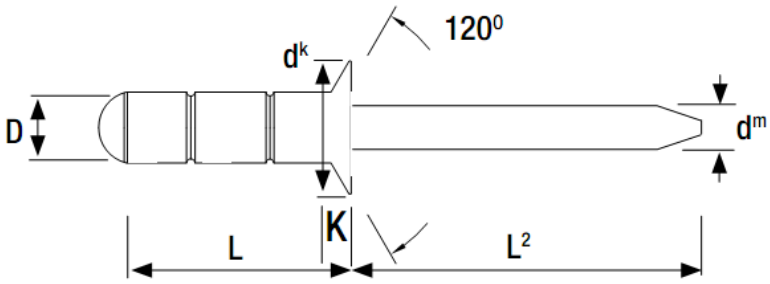

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 3.2 | 10.0 | 2.5 | 6.4 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 1000 |
| | 12.0 | 4.5 | 9.0 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 750 |
| | 14.0 | 6.5 | 10.5 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 1000 |
| | 16.0 | 8.5 | 12.5 | 3.3 | 6.0 | 1.1 | 1.78 | 26.0 | 680 | 980 | 750 |
| 4.0 | 8.0 | 1.5 | 4.5 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 750 |
| | 11.3 | 2.5 | 7.5 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 750 |
| | 16.0 | 7.0 | 12.0 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 500 |
| | 20.0 | 11.0 | 16.0 | 4.1 | 8.0 | 1.4 | 2.18 | 27.0 | 1150 | 1600 | 500 |
| 4.8 | 10.0 | 1.0 | 5.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 500 |
| | 12.0 | 2.0 | 7.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 500 |
| | 17.0 | 7.0 | 12.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 250 |
| | 22.0 | 12.0 | 17.0 | 4.9 | 9.5 | 1.8 | 2.78 | 28.0 | 1500 | 2350 | 250 |