# RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 11 mm long

Supplier Part Number: OJASKS4811



## FEATURES

- **Rivet Body Material:** Aluminium construction ensures lightweight and corrosion-resistant performance.
- **Mandrel Material:** Steel mandrel provides strength and durability during installation.
- **Rivet Type:** Sealed blind rivet design offers a leak-proof seal for enhanced protection.
- **Head Type:** Countersunk head allows for a flush finish, improving aesthetics and reducing snagging.
- **Finish:** Phosphated finish enhances corrosion resistance and longevity.
- **Rivet Diameter:** 4.8 mm diameter suitable for a range of applications.
- **Rivet Length:** 11 mm length accommodates various material thicknesses.
- **Grip Range:** 4.5 mm to 6 mm grip range for versatile use.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality Aluminium Sealed Blind Rivet designed for secure and reliable fastening in various industrial applications. This rivet is ideal for use where a strong, vibration-resistant joint is required, providing a sealed connection to prevent leakage.

## General Specifications

| | |
|---|---|
| Finish | Phosphated |
| Head Type | Countersunk |
| Product Type | Blind Rivet |
| Rivet Type | Sealed Blind Rivet |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 6 mm |
| Minimum Grip | 4.5 mm |


## Mechanical Specifications

| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 11 mm |
| Shear Strength | 2230 N |
| Tensile Strength | 3070 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

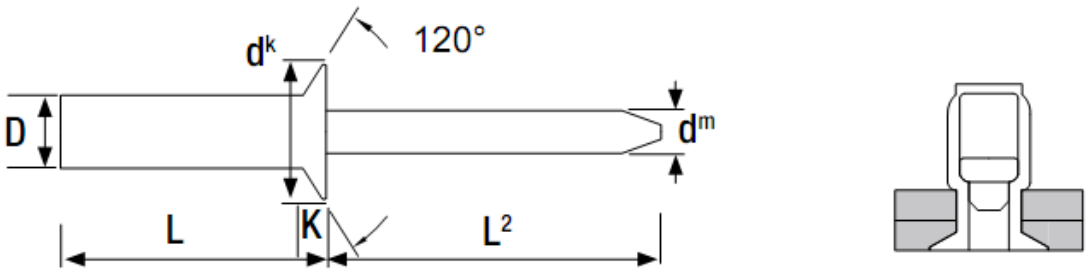


| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| **3.2** | 7.5 | 1.5 | 3.5 | 3.3 | 6.0 | 1.1 | 1.70 | 26.0 | 1070 | 1245 | 1000 |
| | 9.5 | 3.5 | 4.5 | 3.3 | 6.0 | 1.1 | 1.70 | 26.0 | 1070 | 1245 | 1000 |
| | 10.5 | 4.5 | 6.5 | 3.3 | 6.0 | 1.1 | 1.70 | 26.0 | 1070 | 1245 | 1000 |
| | 12.0 | 6.0 | 7.5 | 3.3 | 6.0 | 1.1 | 1.70 | 26.0 | 1070 | 1245 | 1000 |
| | 13.5 | 7.5 | 9.0 | 3.3 | 6.0 | 1.1 | 1.70 | 26.0 | 1070 | 1245 | 750 |
| **4.0** | 9.5 | 2.0 | 4.5 | 4.1 | 7.5 | 1.4 | 2.20 | 27.0 | 1710 | 2240 | 750 |
| | 11.0 | 5.0 | 6.5 | 4.1 | 7.5 | 1.4 | 2.20 | 27.0 | 1710 | 2240 | 750 |
| | 12.5 | 6.0 | 8.0 | 4.1 | 7.5 | 1.4 | 2.20 | 27.0 | 1710 | 2240 | 750 |
| | 14.0 | 8.0 | 9.5 | 4.1 | 7.5 | 1.4 | 2.20 | 27.0 | 1710 | 2240 | 500 |
| **4.8** | 9.5 | 2.5 | 4.5 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 500 |
| | 11.0 | 4.5 | 6.0 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 500 |
| | 12.5 | 6.0 | 7.5 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 500 |
| | 14.0 | 7.5 | 9.0 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 500 |
| | 15.5 | 9.0 | 10.5 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 500 |
| | 19.0 | 10.5 | 13.0 | 4.9 | 9.5 | 1.8 | 2.65 | 28.0 | 2230 | 3070 | 250 |