RS PRO Aluminium/Steel Countersunk Head Blind Rivet, 4.8 mm Diameter x 12.5 mm long

Supplier Part Number: OJASKS4812



FEATURES

- **Sealed Design:** Provides a watertight connection, ideal for outdoor use.
- **Aluminium Body:** Offers excellent corrosion resistance for long-lasting performance.
- **Steel Mandrel:** Ensures strong and reliable fastening.
- **Countersunk Head:** Allows for a flush finish, improving aesthetics and reducing snagging.
- **Phosphated Finish:** Enhances durability and resistance to wear.
- **Wide Grip Range:** Accommodates material thicknesses from 6 mm to 7.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Sealed Blind Rivet is designed for secure fastening in applications where a strong, reliable joint is required. Made from durable aluminium with a steel mandrel, this rivet is ideal for use in environments where corrosion resistance is essential. Its sealed design ensures a watertight connection, making it suitable for outdoor and marine applications.

General Specifications

Finish	Phosphated
Head Type	Countersunk
Product Type	Blind Rivet
Rivet Type	Sealed Blind Rivet
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	7.5 mm
Minimum Grip	6 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	12.5 mm
Shear Strength	2230 N
Tensile Strength	3070 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

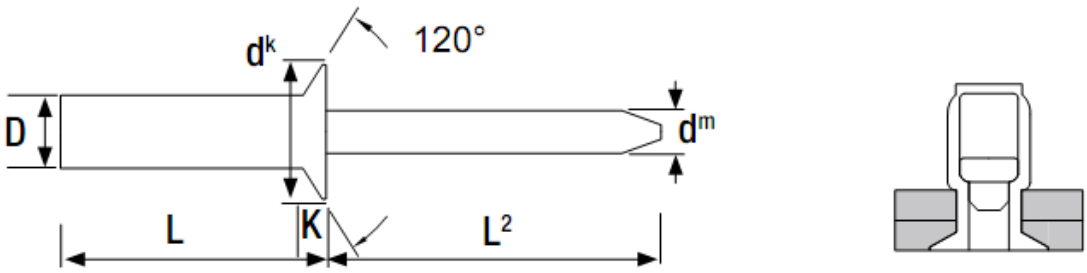

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	7.5	1.5	3.5	3.3	6.0	1.1	1.70	26.0	1070	1245	1000
	9.5	3.5	4.5	3.3	6.0	1.1	1.70	26.0	1070	1245	1000
	10.5	4.5	6.5	3.3	6.0	1.1	1.70	26.0	1070	1245	1000
	12.0	6.0	7.5	3.3	6.0	1.1	1.70	26.0	1070	1245	1000
	13.5	7.5	9.0	3.3	6.0	1.1	1.70	26.0	1070	1245	750
4.0	9.5	2.0	4.5	4.1	7.5	1.4	2.20	27.0	1710	2240	750
	11.0	5.0	6.5	4.1	7.5	1.4	2.20	27.0	1710	2240	750
	12.5	6.0	8.0	4.1	7.5	1.4	2.20	27.0	1710	2240	750
	14.0	8.0	9.5	4.1	7.5	1.4	2.20	27.0	1710	2240	500
4.8	9.5	2.5	4.5	4.9	9.5	1.8	2.65	28.0	2230	3070	500
	11.0	4.5	6.0	4.9	9.5	1.8	2.65	28.0	2230	3070	500
	12.5	6.0	7.5	4.9	9.5	1.8	2.65	28.0	2230	3070	500
	14.0	7.5	9.0	4.9	9.5	1.8	2.65	28.0	2230	3070	500
	15.5	9.0	10.5	4.9	9.5	1.8	2.65	28.0	2230	3070	500
	19.0	10.5	13.0	4.9	9.5	1.8	2.65	28.0	2230	3070	250