
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4 mm Diameter x 20 mm long

Supplier Part Number: OJASL4020

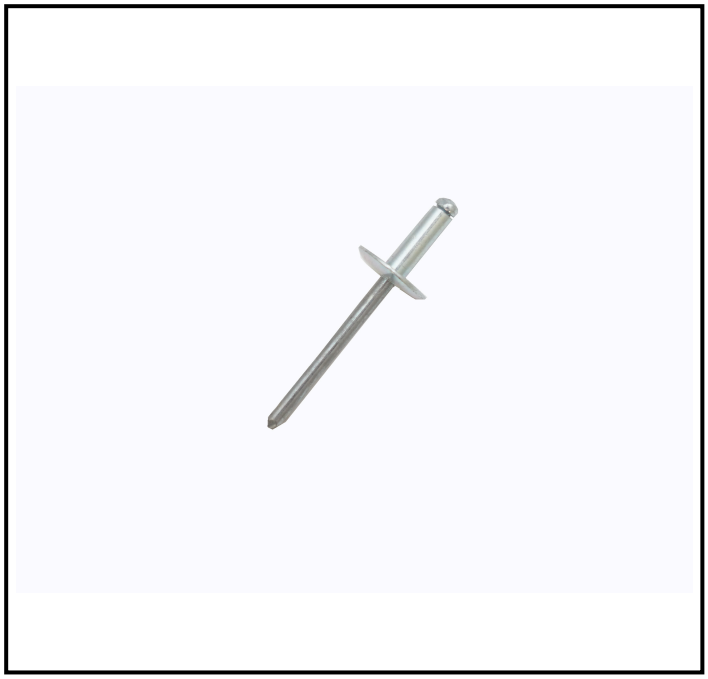

FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides strong and reliable fastening.
- **Flange Head:** Ensures a secure fit and distributes load evenly.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer lifespan.
- **Wide Grip Range:** Accommodates material thicknesses from 14 mm to 15.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of industrial applications. With a 4 mm diameter and 20 mm length, it is ideal for joining materials where access is only available from one side. The rivet's aluminium body ensures lightweight durability, while the steel mandrel provides robust support.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	15.5 mm
Minimum Grip	14 mm


Mechanical Specifications


Head Diameter	12 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	20 mm
Shear Strength	1180 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

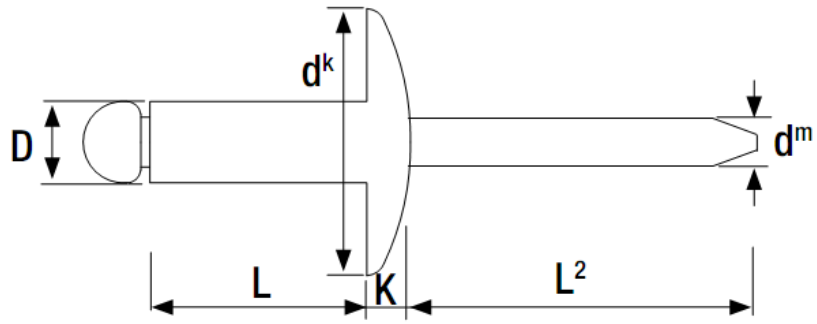



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.5	3.3	9.5	2.0	1.70	26.0	740	980	500
	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	12.0	7.0	9.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	14.0	9.0	11.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	6.0	0.5	2.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	8.0	2.0	4.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	10.0	4.0	6.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	12.0	6.0	8.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	14.0	8.0	10.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	16.0	10.0	12.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	18.0	12.0	14.0	4.9	14.0	2.5	2.70	28.0	1540	2230	400
	20.0	14.0	15.5	4.9	14.0	2.5	2.70	28.0	1540	2230	300
4.8	10.0	3.5	5.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	12.0	5.5	7.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	14.0	7.5	9.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	16.0	9.0	11.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	18.0	11.0	13.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	20.0	13.0	15.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200
	22.0	15.0	17.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200