
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 14 mm long

Supplier Part Number: OJASL481414

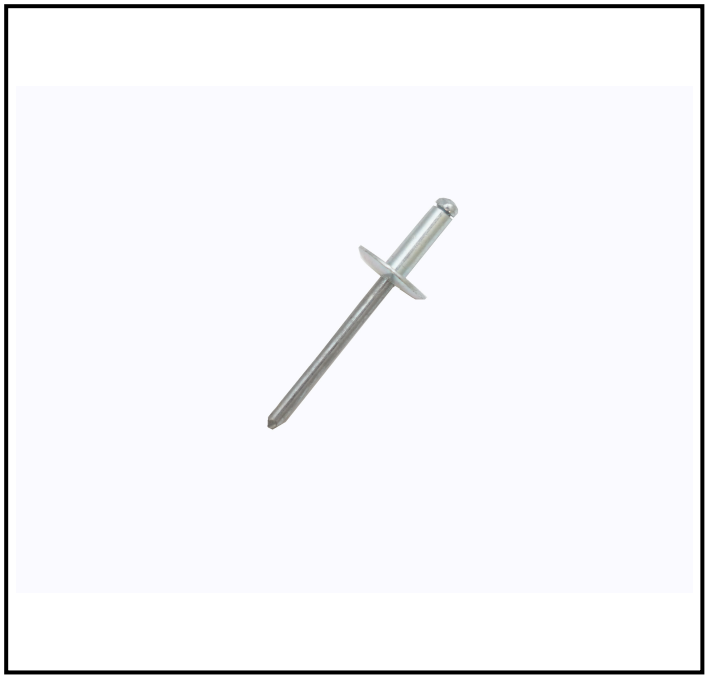

FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Provides additional strength and secure fastening.
- **Flange Head:** Ensures a larger bearing surface for increased stability.
- **Trivalent Chromate Finish:** Offers enhanced corrosion protection.
- **Wide Grip Range:** Suitable for materials with a thickness between 7.5 mm and 9.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This rivet features an aluminium body with a steel mandrel, providing strength and durability. Ideal for applications requiring a reliable and efficient fastening solution.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	9.5 mm
Minimum Grip	7.5 mm


Mechanical Specifications


Head Diameter	14 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	14 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

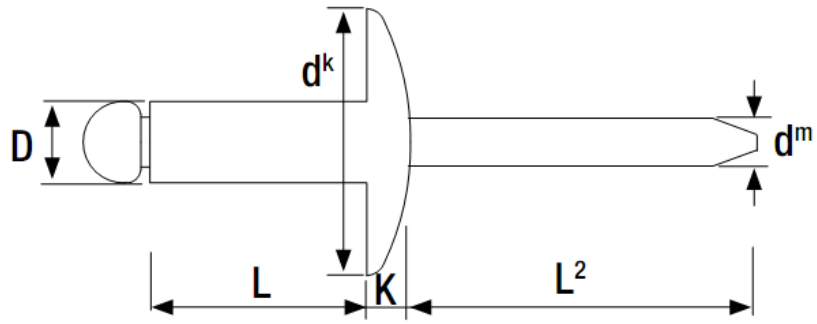



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.5	3.3	9.5	2.0	1.70	26.0	740	980	500
	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	12.0	7.0	9.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	14.0	9.0	11.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	6.0	0.5	2.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	8.0	2.0	4.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	10.0	4.0	6.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	12.0	6.0	8.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	14.0	8.0	10.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	16.0	10.0	12.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	18.0	12.0	14.0	4.9	14.0	2.5	2.70	28.0	1540	2230	400
	20.0	14.0	15.5	4.9	14.0	2.5	2.70	28.0	1540	2230	300
4.8	10.0	3.5	5.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	12.0	5.5	7.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	14.0	7.5	9.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	16.0	9.0	11.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	18.0	11.0	13.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	20.0	13.0	15.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200
	22.0	15.0	17.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200