
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 18 mm long

Supplier Part Number: OJASL481814

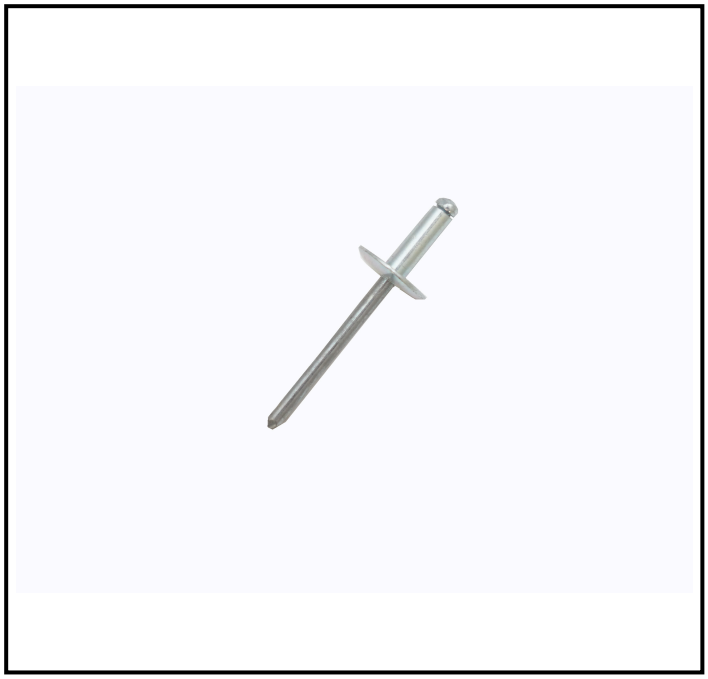

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 18 mm suitable for a range of material thicknesses
- **Head Type:** Flange provides a larger bearing surface for increased load distribution
- **Mandrel Material:** Steel for enhanced strength and durability
- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant properties
- **Maximum Grip:** 13 mm accommodates thicker materials
- **Minimum Grip:** 11 mm ensures versatility in application
- **Finish:** Clear Trivalent Chromate Zinc for added corrosion resistance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. With an aluminium body and steel mandrel, it offers a reliable and durable solution for joining materials. Ideal for use in construction and manufacturing, this blind rivet ensures a strong hold with minimal effort.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	13 mm
Minimum Grip	11 mm


Mechanical Specifications


Head Diameter	14 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	18 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

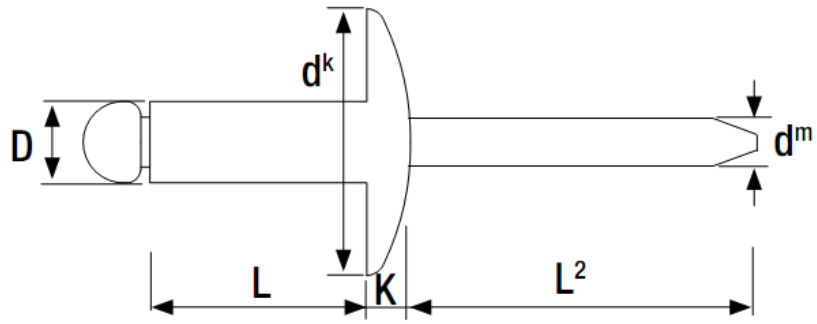



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.0	3.5	3.3	9.5	2.0	1.70	26.0	740	980	500
	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	12.0	7.0	9.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	14.0	9.0	11.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	6.0	0.5	2.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	8.0	2.0	4.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	10.0	4.0	6.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	12.0	6.0	8.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	14.0	8.0	10.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	16.0	10.0	12.0	4.9	14.0	2.5	2.70	28.0	1540	2230	500
	18.0	12.0	14.0	4.9	14.0	2.5	2.70	28.0	1540	2230	400
	20.0	14.0	15.5	4.9	14.0	2.5	2.70	28.0	1540	2230	300
4.8	10.0	3.5	5.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	12.0	5.5	7.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	14.0	7.5	9.5	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	16.0	9.0	11.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	18.0	11.0	13.0	4.9	14.0	2.5	2.70	28.0	1540	2230	250
	20.0	13.0	15.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200
	22.0	15.0	17.0	4.9	14.0	2.5	2.70	28.0	1540	2230	200