
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 26 mm long

Supplier Part Number: OJASL482614

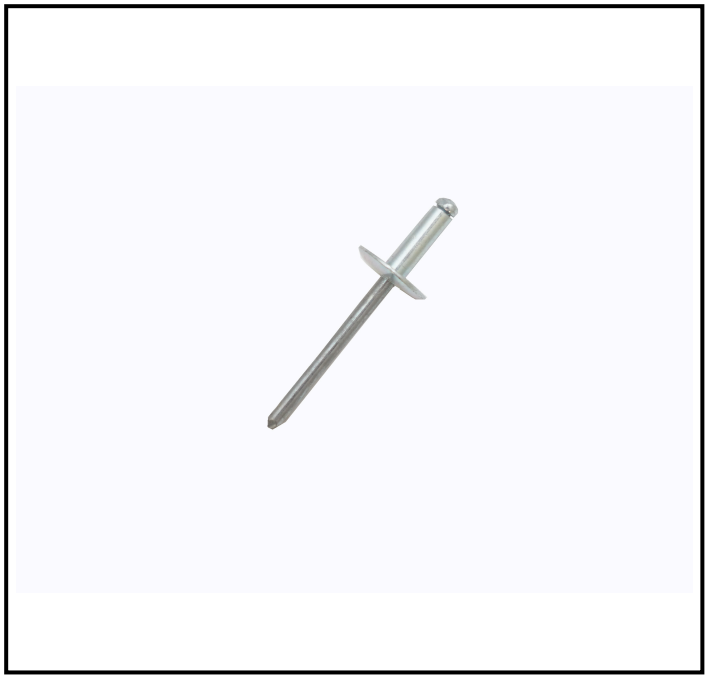

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant properties.
- **Steel Mandrel:** Provides additional strength and durability.
- **Flange Head Type:** Ensures a larger bearing surface for better load distribution.
- **Clear Trivalent Chromate Finish:** Enhances corrosion resistance and longevity.
- **Rivet Diameter of 4.8 mm:** Suitable for a wide range of fastening applications.
- **Rivet Length of 26 mm:** Accommodates materials with a grip range of 19.5 mm to 21 mm.
- **Complies with DIN 7337:** Meets industry standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Blind Rivet is designed for secure fastening in various industrial applications. With an aluminium body and steel mandrel, this rivet provides reliable strength and corrosion resistance. Ideal for applications where access is only available from one side, ensuring a strong and durable hold.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	21 mm
Minimum Grip	19.5 mm


Mechanical Specifications

Head Diameter	14 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	26 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

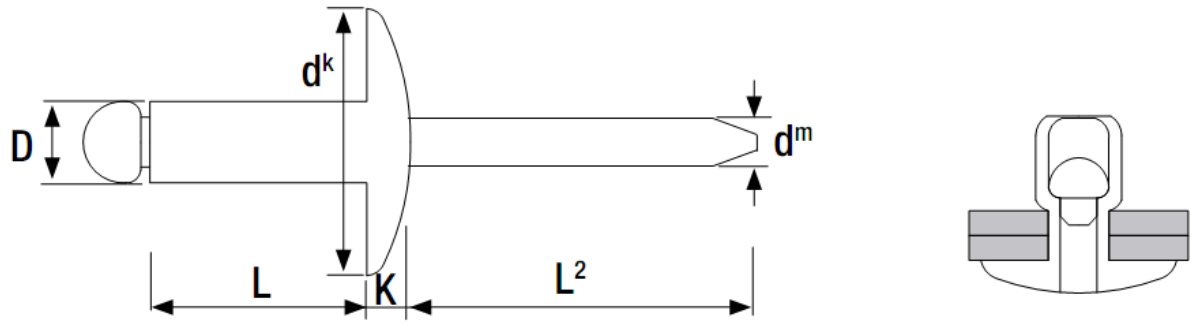

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	24.0	17.0	19.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	2.5	2.70	28.0	1540	2230	175
	28.0	20.0	23.0	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	30.0	23.0	24.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	10.0	3.5	5.5	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	12.0	5.5	7.5	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	14.0	7.5	9.5	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	18.0	11.0	13.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	20.0	13.0	15.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	22.0	15.0	17.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	2.5	2.70	28.0	1540	2230	175
	28.0	20.0	23.0	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	30.0	23.0	24.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	35.0	24.5	29.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	40.0	30.0	35.0	4.9	16.0	2.5	2.70	28.0	1540	2230	125