
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 30 mm long

Supplier Part Number: OJASL483014

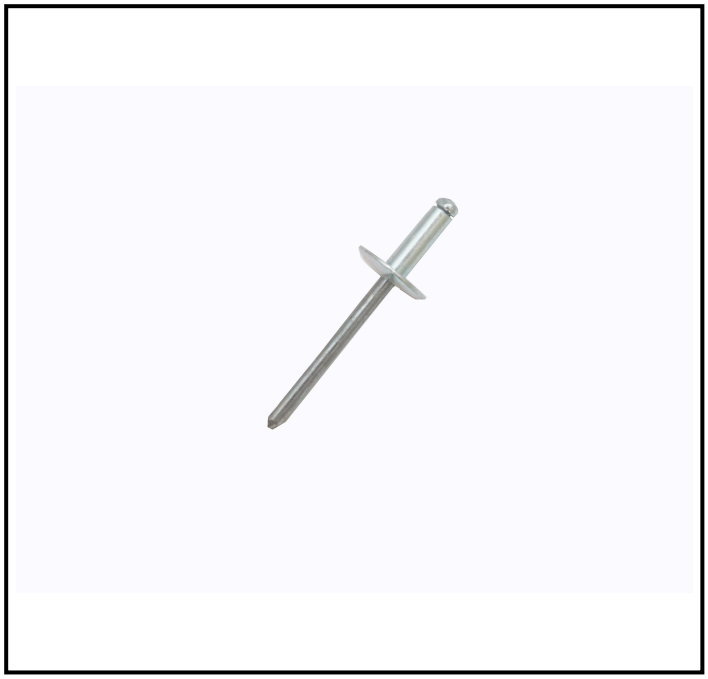

FEATURES

- **Rivet Body Material:** Aluminium provides excellent corrosion resistance and lightweight properties.
- **Mandrel Material:** Steel ensures strong and secure fastening.
- **Rivet Diameter:** 4.8 mm for compatibility with standard hole sizes.
- **Rivet Length:** 30 mm suitable for a range of material thicknesses.
- **Head Type:** Flange offers a larger bearing surface for increased load distribution.
- **Finish:** Trivalent Chromate Zinc for enhanced corrosion protection.
- **Maximum Grip:** 24.5 mm allows for use with thicker materials.
- **Minimum Grip:** 23 mm ensures a tight fit for thinner materials.
- **Fixing Hole Diameter:** 4.9 mm for precise and secure installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This aluminium rivet with a steel mandrel provides reliable performance and durability, making it ideal for use in environments where strength and corrosion resistance are required.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	24.5 mm
Minimum Grip	23 mm


Mechanical Specifications

Head Diameter	14 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	30 mm
Shear Strength	1540 N
Tensile Strength	2230 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

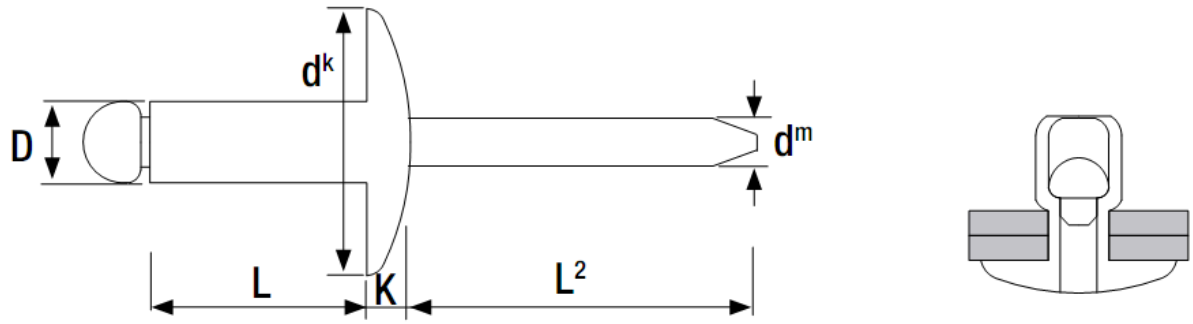

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	24.0	17.0	19.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	2.5	2.70	28.0	1540	2230	175
	28.0	20.0	23.0	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	30.0	23.0	24.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	10.0	3.5	5.5	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	12.0	5.5	7.5	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	14.0	7.5	9.5	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	18.0	11.0	13.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	20.0	13.0	15.0	4.9	16.0	2.5	2.70	28.0	1540	2230	250
	22.0	15.0	17.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	2.5	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	2.5	2.70	28.0	1540	2230	175
	28.0	20.0	23.0	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	30.0	23.0	24.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	35.0	24.5	29.5	4.9	16.0	2.5	2.70	28.0	1540	2230	150
	40.0	30.0	35.0	4.9	16.0	2.5	2.70	28.0	1540	2230	125