
RS PRO Aluminium/Steel Flange Head Blind Rivet, 3.2 mm Diameter x 9.5mm long

Supplier Part Number: OJASLM3209

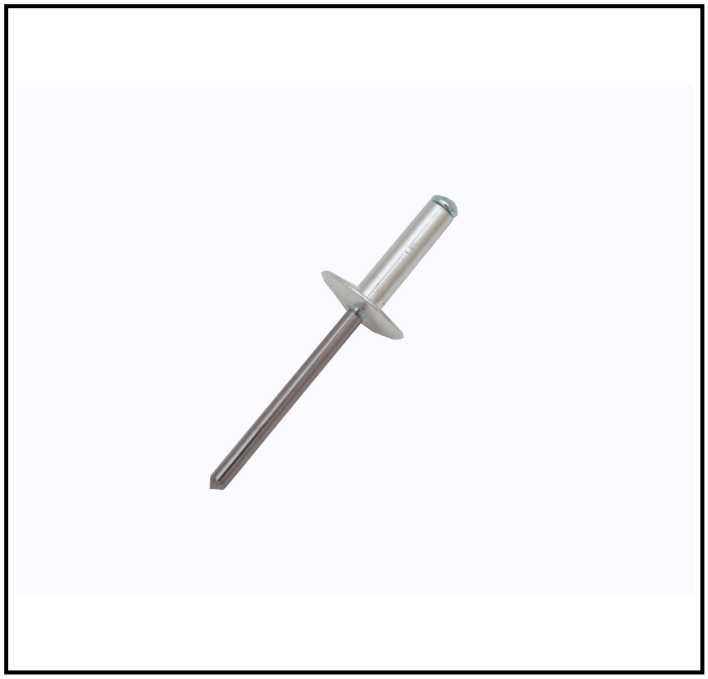

FEATURES

- **Rivet Body Material:** Aluminium provides excellent corrosion resistance and lightweight properties.
- **Mandrel Material:** Steel ensures strong and durable fastening.
- **Head Type:** Flange offers a larger bearing surface for increased load distribution.
- **Finish:** Trivalent Chromate Zinc enhances corrosion resistance and durability.
- **Rivet Diameter:** 3.2 mm suitable for a wide range of applications.
- **Rivet Length:** 9.5 mm accommodates various material thicknesses.
- **Grip Range:** 1.3 mm to 6.4 mm allows for versatile use across different material combinations.
- **Fixing Hole Diameter:** 3.3 mm ensures a precise fit for secure fastening.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 3.2 mm Aluminium Blind Rivet designed for secure fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side, providing a reliable and efficient solution for joining materials.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	6.4 mm
Minimum Grip	1.3 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	9.5 mm
Shear Strength	680 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

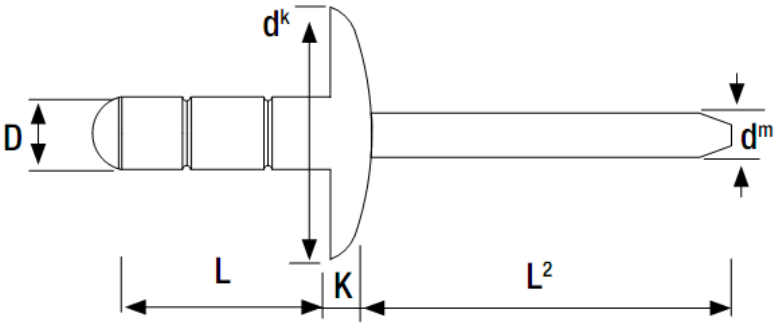



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	1.0	5.0	3.3	9.5	2.0	1.78	26.0	680	980	500
	9.5	1.3	6.4	3.3	9.5	2.0	1.78	26.0	680	980	500
	12.0	4.5	9.0	3.3	9.5	2.0	1.78	26.0	680	980	500
	16.0	8.5	12.5	3.3	9.5	2.0	1.78	26.0	680	980	500
4.0	10.0	1.5	6.5	4.1	12.0	2.5	2.18	27.0	1150	1600	500
	12.7	3.5	8.5	4.1	12.0	2.5	2.18	27.0	1150	1600	500
	17.0	7.5	12.5	4.1	12.0	2.5	2.18	27.0	1150	1600	400
	20.0	11.5	15.5	4.1	12.0	2.5	2.18	27.0	1150	1600	250
4.8	10.0	1.0	5.0	4.1	12.0	2.5	2.18	27.0	1150	1600	250
	12.0	3.0	7.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	14.0	5.0	9.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	17.0	8.0	12.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	20.0	11.0	14.5	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	24.8	16.0	19.0	4.9	16.0	2.5	2.78	28.0	1500	2350	200