
RS PRO Aluminium/Steel Flange Head Blind Rivet, 4.8 mm Diameter x 12 mm long

Supplier Part Number: OJASLM481216

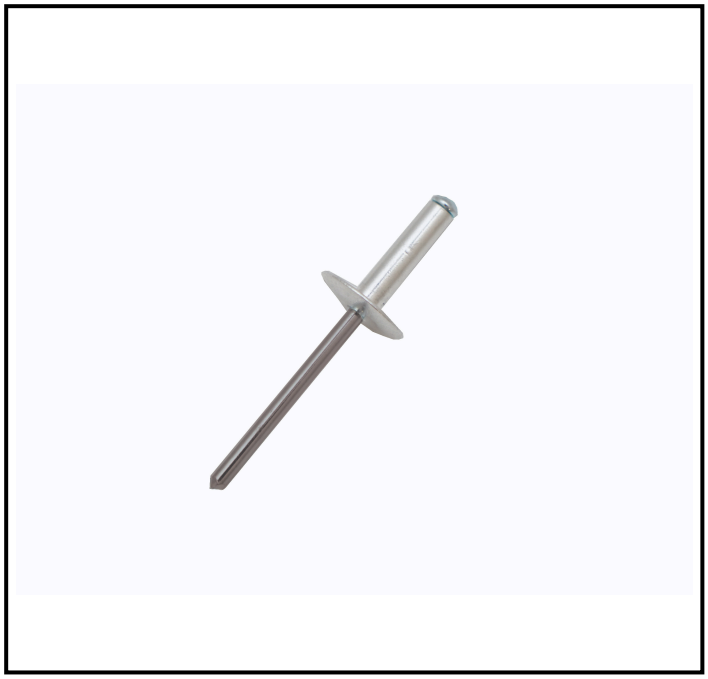

FEATURES

- **Rivet Body Material:** Aluminium construction ensures lightweight and corrosion-resistant performance.
- **Mandrel Material:** Steel mandrel provides strength and durability during installation.
- **Head Type:** Flange head offers a larger bearing surface for increased load distribution.
- **Finish:** Clear trivalent chromate zinc finish enhances corrosion resistance.
- **Rivet Diameter:** 4.8 mm diameter suitable for a wide range of applications.
- **Rivet Length:** 12 mm length accommodates different material thicknesses.
- **Grip Range:** Supports a grip range from 3 mm to 7 mm for versatile use.
- **Fixing Hole Diameter:** 4.9 mm fixing hole diameter for precise installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 4.8 mm Aluminium Blind Rivet designed for secure and efficient fastening in various applications. This blind rivet is ideal for situations where access is only available from one side, providing a reliable and durable connection.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	7 mm
Minimum Grip	3 mm


Mechanical Specifications

Head Diameter	16 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	12 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

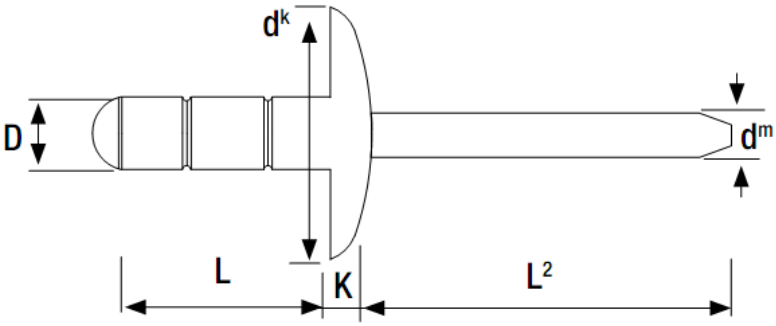



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	1.0	5.0	3.3	9.5	2.0	1.78	26.0	680	980	500
	9.5	1.3	6.4	3.3	9.5	2.0	1.78	26.0	680	980	500
	12.0	4.5	9.0	3.3	9.5	2.0	1.78	26.0	680	980	500
	16.0	8.5	12.5	3.3	9.5	2.0	1.78	26.0	680	980	500
4.0	10.0	1.5	6.5	4.1	12.0	2.5	2.18	27.0	1150	1600	500
	12.7	3.5	8.5	4.1	12.0	2.5	2.18	27.0	1150	1600	500
	17.0	7.5	12.5	4.1	12.0	2.5	2.18	27.0	1150	1600	400
	20.0	11.5	15.5	4.1	12.0	2.5	2.18	27.0	1150	1600	250
4.8	10.0	1.0	5.0	4.1	12.0	2.5	2.18	27.0	1150	1600	250
	12.0	3.0	7.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	14.0	5.0	9.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	17.0	8.0	12.0	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	20.0	11.0	14.5	4.9	16.0	2.5	2.78	28.0	1500	2350	250
	24.8	16.0	19.0	4.9	16.0	2.5	2.78	28.0	1500	2350	200