
RS PRO Aluminium/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 12.5mm long

Supplier Part Number: OJASSDM4812

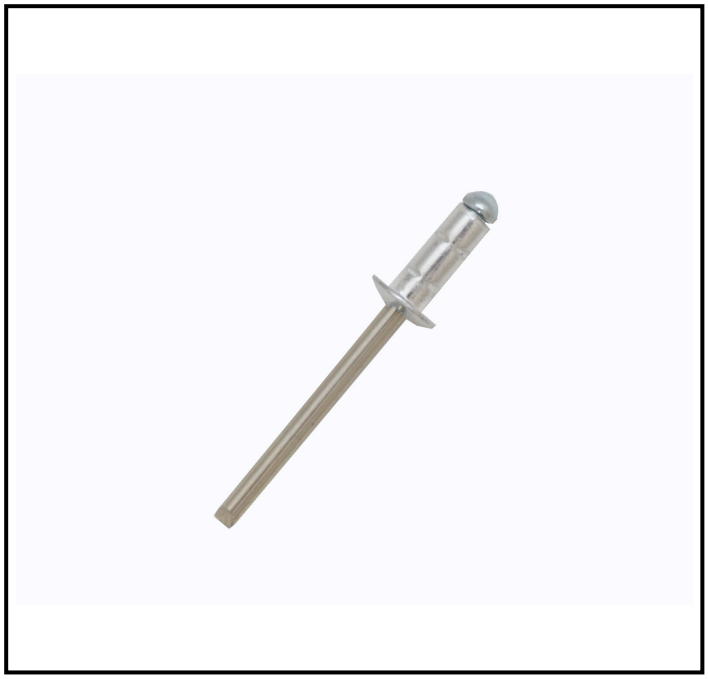

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and reliable fastening
- **Rivet Length:** 12.5 mm suitable for a range of material thicknesses
- **Head Type:** Dome for a neat and flush finish
- **Mandrel Material:** Stainless Steel for enhanced strength and corrosion resistance
- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant properties
- **Maximum Grip:** 7.5 mm accommodating thicker materials
- **Minimum Grip:** 3 mm for versatility in application
- **Fixing Hole Diameter:** 4.9 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in various industrial applications. Made with an aluminium body and stainless steel mandrel, it provides excellent durability and corrosion resistance. Ideal for use where access is only possible from one side of the workpiece.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	7.5 mm
Minimum Grip	3 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	12.5 mm
Shear Strength	1500 N
Tensile Strength	2530 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

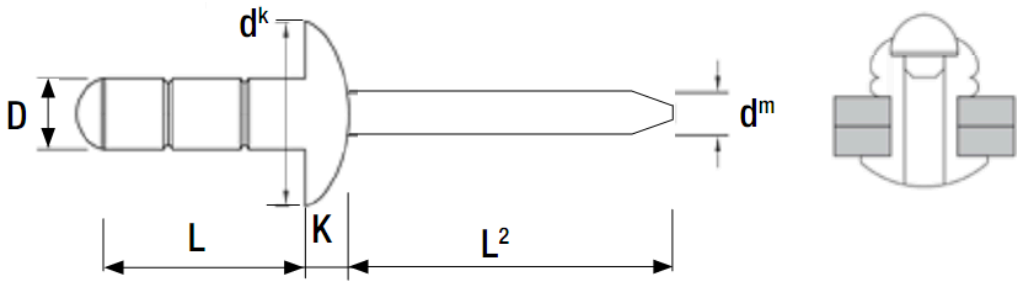

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	1.0	4.8	3.3	6.0	1.4	1.78	26.0	680	980	1000
	9.5	2.0	6.4	3.3	6.0	1.4	1.78	26.0	680	980	1000
	12.5	4.5	9.0	3.3	6.0	1.4	1.78	26.0	680	980	1000
4.0	9.5	2.0	5.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	12.7	3.5	8.0	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	16.9	6.0	12.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
4.8	10.3	1.0	5.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	12.5	3.0	7.5	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	16.9	7.0	12.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	20.0	10.0	15.0	4.9	9.5	2.0	2.78	28.0	1500	2530	250
	24.8	12.7	19.5	4.9	9.5	2.0	2.78	28.0	1500	2530	250