
RS PRO Aluminium/Stainless Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJASSDM4815

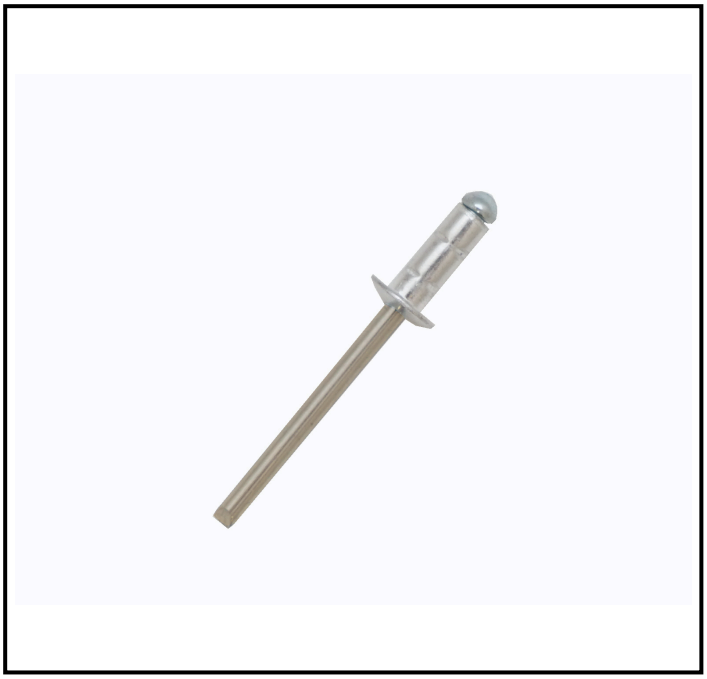

FEATURES

- **Rivet Diameter:** 4.8 mm for precise fitting
- **Rivet Length:** 15 mm for versatile use
- **Head Type:** Dome for a smooth finish
- **Mandrel Material:** Stainless steel for enhanced durability
- **Rivet Body Material:** Aluminium for lightweight strength
- **Maximum Grip:** 10 mm for accommodating thicker materials
- **Minimum Grip:** 5 mm for flexibility in application

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This rivet is made from durable aluminium with a stainless steel mandrel, providing excellent corrosion resistance and strength. Ideal for applications requiring a reliable and permanent joint, it supports a grip range from 5 mm to 10 mm.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Stainless Steel
Maximum Grip	10 mm
Minimum Grip	5 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	15 mm
Shear Strength	1500 N
Tensile Strength	2530 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

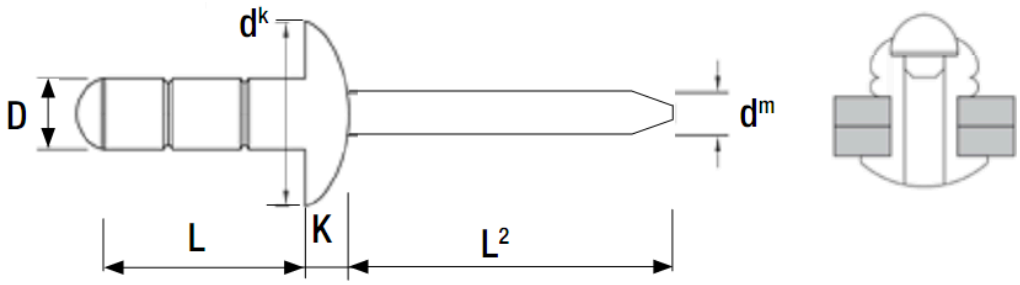

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	1.0	4.8	3.3	6.0	1.4	1.78	26.0	680	980	1000
	9.5	2.0	6.4	3.3	6.0	1.4	1.78	26.0	680	980	1000
	12.5	4.5	9.0	3.3	6.0	1.4	1.78	26.0	680	980	1000
4.0	9.5	2.0	5.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	12.7	3.5	8.0	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	16.9	6.0	12.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
4.8	10.3	1.0	5.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	12.5	3.0	7.5	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	16.9	7.0	12.0	4.9	9.5	2.0	2.78	28.0	1500	2530	500
	20.0	10.0	15.0	4.9	9.5	2.0	2.78	28.0	1500	2530	250
	24.8	12.7	19.5	4.9	9.5	2.0	2.78	28.0	1500	2530	250