
RS PRO Aluminium/Steel Dome Head Blind Rivet, 2.4 mm Diameter x 6 mm long

Supplier Part Number: OJCLASD2406WH

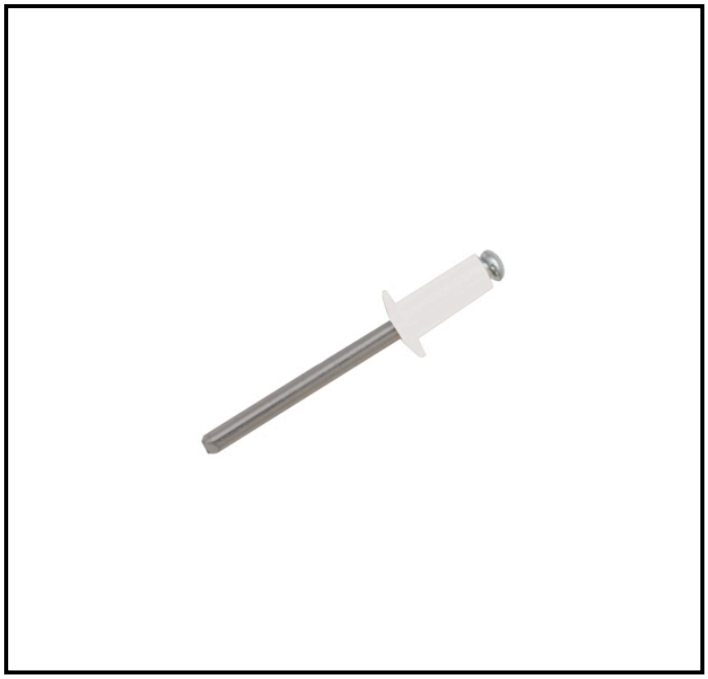

FEATURES

- **Aluminium Body:** Provides lightweight yet strong fastening.
- **Steel Mandrel:** Ensures robust and secure installation.
- **Dome Head:** Offers a neat and flush finish.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.
- **2.4 mm Diameter:** Suitable for a variety of applications.
- **6 mm Length:** Accommodates different material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a reliable and efficient solution for fastening applications with its 2.4 mm Aluminium Blind Rivet. Designed for ease of use, this rivet is ideal for applications where access is only available from one side. The combination of an aluminium body and steel mandrel ensures a strong and durable hold.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	2.5 mm
Mandrel Material	Steel
Maximum Grip	3.5 mm
Minimum Grip	1.5 mm


Mechanical Specifications


Head Diameter	5 mm
Rivet Body Material	Aluminium
Rivet Diameter	2.4 mm
Rivet Length	6 mm
Shear Strength	315 N
Tensile Strength	355 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

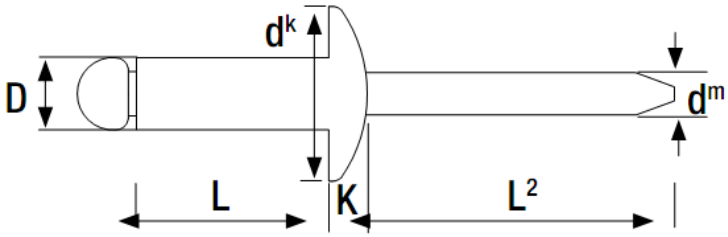



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.2	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500