
RS PRO Aluminium/Steel Dome Head Blind Rivet, 2.4 mm Diameter x 8 mm long

Supplier Part Number: OJCLASD2408BL

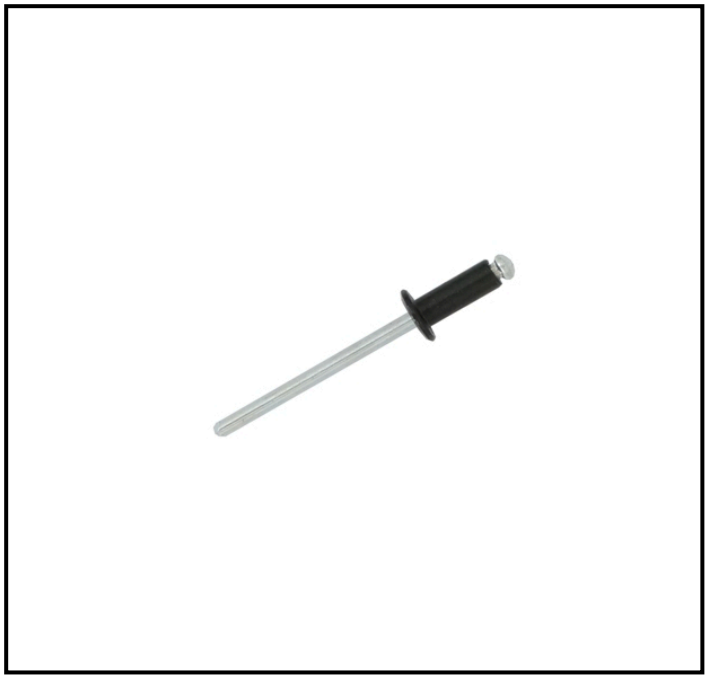

FEATURES

- **Dome Head:** Provides a neat and smooth finish.
- **Aluminium Body:** Offers lightweight and corrosion-resistant properties.
- **Steel Mandrel:** Ensures strong and durable fastening.
- **2.4 mm Diameter:** Suitable for precise applications.
- **8 mm Length:** Accommodates a range of material thicknesses.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.
- **Compliance with DIN 7337:** Meets industry standards for quality.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. With a dome head and steel mandrel, it offers reliable performance in various industrial settings. The rivet is ideal for joining materials with a grip range of 3.5 mm to 5.5 mm.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	2.5 mm
Mandrel Material	Steel
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	5 mm
Rivet Body Material	Aluminium
Rivet Diameter	2.4 mm
Rivet Length	8 mm
Shear Strength	315 N
Tensile Strength	355 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

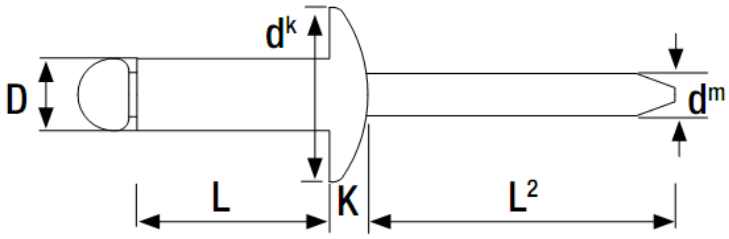



Nominal Diameter mm	Article Number	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity	Price £ Per 1000
D		L				dk	K	dm	L2				
2.4	OJCLASD2404BL	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.14
	OJCLASD2406BL	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.21
	OJCLASD2408BL	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.63
	OJCLASD2410BL	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£17.29
	OJCLASD2412BL	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£19.44
3.2	OJCLASD3204BL	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.25
	OJCLASD3206BL	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.98
	OJCLASD3208BL	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£16.54
	OJCLASD3210BL	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£17.79
	OJCLASD3212BL	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.09
	OJCLASD3214BL	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.95
	OJCLASD3216BL	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£20.96
	OJCLASD3218BL	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£22.55
	OJCLASD3220BL	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£24.20
	OJCLASD3225BL	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500	£29.03