
RS PRO Aluminium/Steel Dome Head Blind Rivet, 2.4 mm Diameter x 8 mm long

Supplier Part Number: OJCLASD2408WH

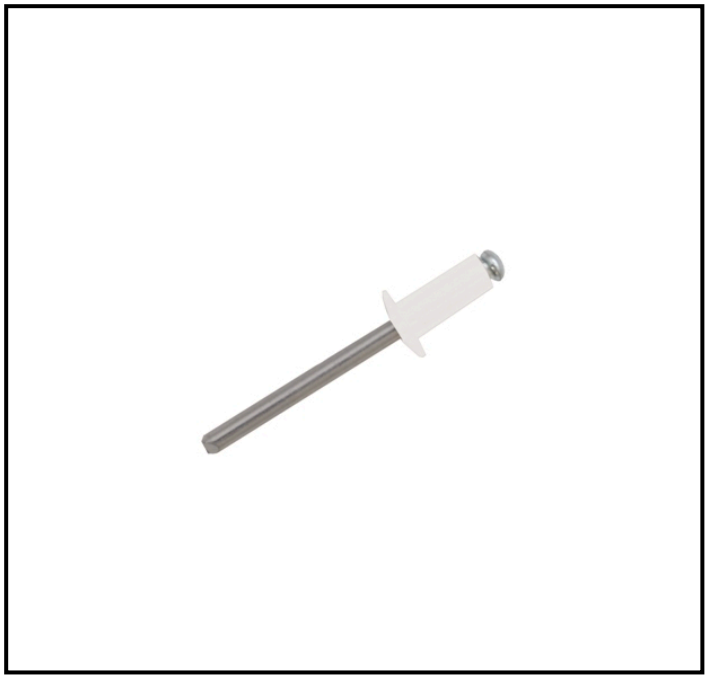

FEATURES

- **Rivet Diameter:** 2.4 mm for precise fastening
- **Rivet Length:** 8 mm suitable for a range of material thicknesses
- **Head Type:** Dome for a smooth finish
- **Mandrel Material:** Steel for enhanced strength
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Grip Range:** 3.5 mm to 5.5 mm for versatile applications
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality aluminium blind rivet designed for secure fastening in a variety of applications. With a rivet diameter of 2.4 mm and a length of 8 mm, this product is ideal for joining materials where access is only available from one side. The combination of an aluminium body and a steel mandrel ensures durability and reliable performance.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	2.5 mm
Mandrel Material	Steel
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	5 mm
Rivet Body Material	Aluminium
Rivet Diameter	2.4 mm
Rivet Length	8 mm
Shear Strength	315 N
Tensile Strength	355 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

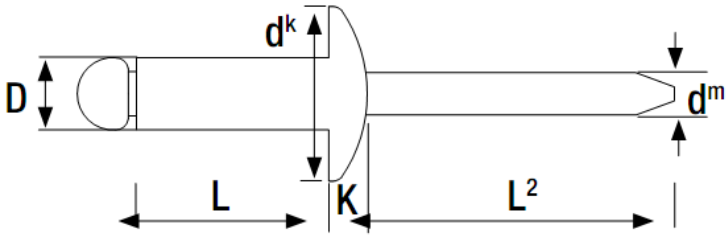



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.2	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500