
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 2.4 mm Diameter x 10 mm long

Supplier Part Number: OJCLASD2410BL

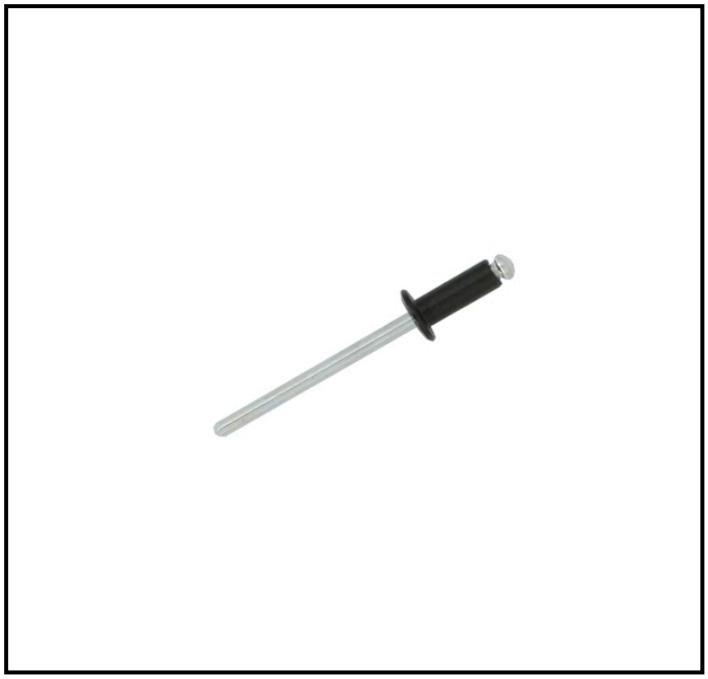

## FEATURES

- **Rivet Diameter:** 2.4 mm for precise fitting in small holes
- **Rivet Length:** 10 mm suitable for materials with a grip range of 5.5 mm to 7.5 mm
- **Head Type:** Dome head for a neat and flush finish
- **Mandrel Material:** Steel mandrel for added strength and secure fastening
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO Aluminium Blind Rivet with a steel mandrel is designed for secure fastening in a variety of applications. This rivet is ideal for situations where access is only available from one side, providing a reliable and durable connection.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 2.5 mm |
| Mandrel Material | Steel |
| Maximum Grip | 7.5 mm |
| Minimum Grip | 5.5 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 2.4 mm |
| Rivet Length | 10 mm |
| Shear Strength | 315 N |
| Tensile Strength | 355 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

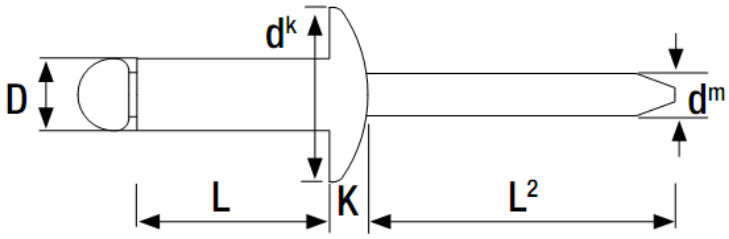

| Nominal Diameter mm | Article Number | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity | Price £ Per 1000 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| D | | L | | | | dk | K | dm | L2 | | | | |
| 2.4 | OJCLASD2404BL | 4.0 | 0.5 | 2.0 | 2.5 | 5.0 | 0.7 | 1.45 | 26.0 | 315 | 355 | 1000 | £16.14 |
| | OJCLASD2406BL | 6.0 | 1.5 | 3.5 | 2.5 | 5.0 | 0.7 | 1.45 | 26.0 | 315 | 355 | 1000 | £16.21 |
| | OJCLASD2408BL | 8.0 | 3.5 | 5.5 | 2.5 | 5.0 | 0.7 | 1.45 | 26.0 | 315 | 355 | 1000 | £16.63 |
| | OJCLASD2410BL | 10.0 | 5.5 | 7.5 | 2.5 | 5.0 | 0.7 | 1.45 | 26.0 | 315 | 355 | 1000 | £17.29 |
| | OJCLASD2412BL | 12.0 | 7.5 | 9.5 | 2.5 | 5.0 | 0.7 | 1.45 | 26.0 | 315 | 355 | 1000 | £19.44 |
| 3.2 | OJCLASD3204BL | 4.0 | 0.5 | 1.5 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £14.25 |
| | OJCLASD3206BL | 6.0 | 1.5 | 3.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £14.98 |
| | OJCLASD3208BL | 8.0 | 3.5 | 5.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £16.54 |
| | OJCLASD3210BL | 10.0 | 5.0 | 7.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £17.79 |
| | OJCLASD3212BL | 12.0 | 7.0 | 9.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £18.09 |
| | OJCLASD3214BL | 14.0 | 9.0 | 11.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 1000 | £18.95 |
| | OJCLASD3216BL | 16.0 | 11.0 | 12.5 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 500 | £20.96 |
| | OJCLASD3218BL | 18.0 | 12.5 | 14.5 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 500 | £22.55 |
| | OJCLASD3220BL | 20.0 | 14.5 | 16.5 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 500 | £24.20 |
| | OJCLASD3225BL | 25.0 | 17.0 | 21.0 | 3.3 | 6.5 | 0.8 | 1.75 | 26.0 | 760 | 980 | 500 | £29.03 |