
RS PRO Aluminium/Steel Dome Head Blind Rivet, 2.4 mm Diameter x 12 mm long

Supplier Part Number: OJCLASD2412WH

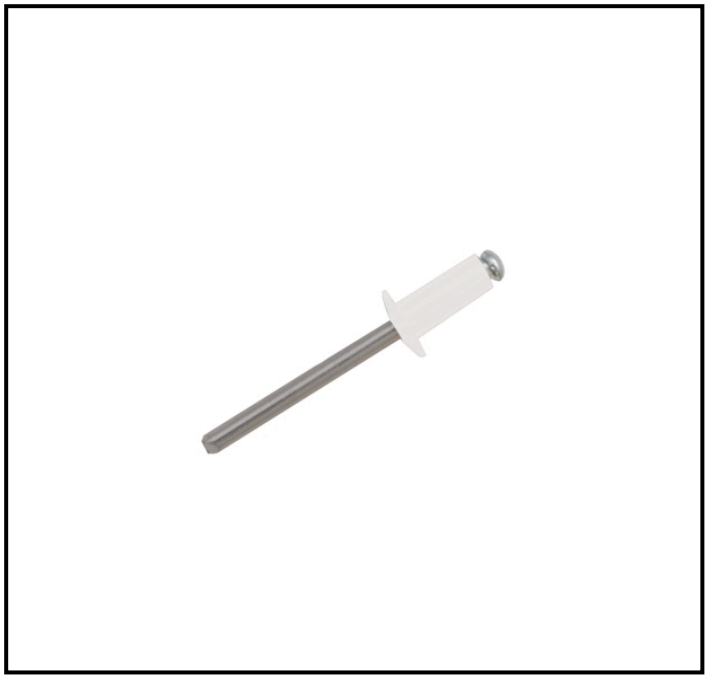

FEATURES

- **Aluminium Body:** Offers a lightweight and corrosion-resistant fastening solution.
- **Steel Mandrel:** Provides enhanced strength and reliability during installation.
- **Dome Head Type:** Ensures a neat and smooth finish on the surface.
- **Trivalent Chromate Finish:** Provides additional corrosion resistance for longevity.
- **Wide Grip Range:** Accommodates material thicknesses from 7.5 mm to 9.5 mm.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of applications. With a 2.4 mm diameter and a length of 12 mm, this rivet is ideal for joining materials where access is only available from one side. The aluminium body ensures a lightweight yet durable solution, while the steel mandrel provides additional strength.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	2.5 mm
Mandrel Material	Steel
Maximum Grip	9.5 mm
Minimum Grip	7.5 mm


Mechanical Specifications


Head Diameter	5 mm
Rivet Body Material	Aluminium
Rivet Diameter	2.4 mm
Rivet Length	12 mm
Shear Strength	315 N
Tensile Strength	355 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

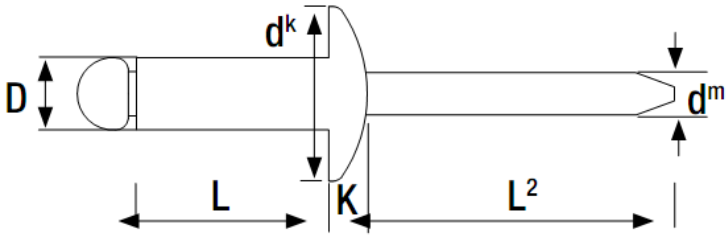



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.2	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500