
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 4 mm long

Supplier Part Number: OJCLASD3204BL

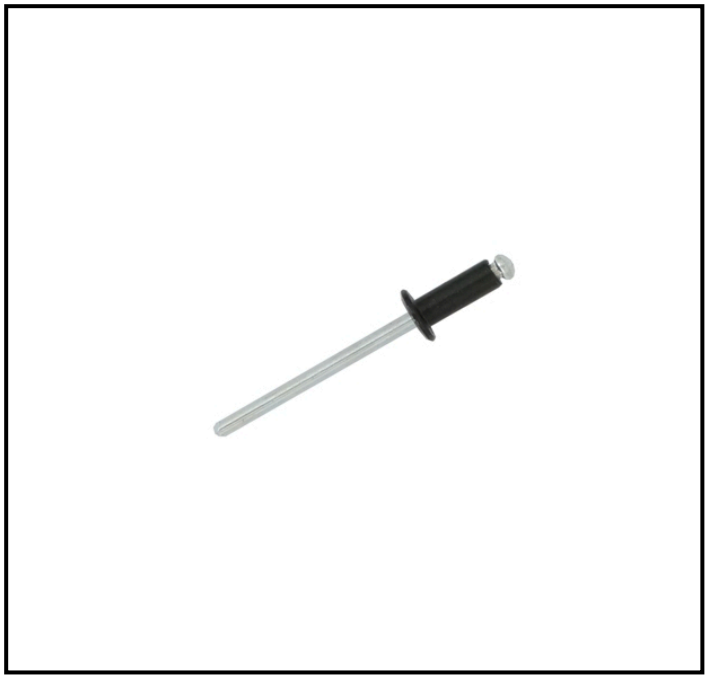

FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides robust support during installation.
- **Dome Head:** Ensures a neat finish and distributes load evenly.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer-lasting performance.
- **3.2 mm Diameter:** Suitable for a variety of applications requiring precise fastening.
- **4 mm Length:** Accommodates materials with a grip range of 0.5 mm to 1.5 mm.
- **Compliance with Standards:** Meets DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, and ISO TS 16949:2009 for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for quick and efficient fastening in various industrial applications. These rivets are ideal for situations where access is only available from one side, providing a reliable and secure hold. The aluminium body ensures lightweight durability, making them suitable for a wide range of materials.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	4 mm
Shear Strength	760 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

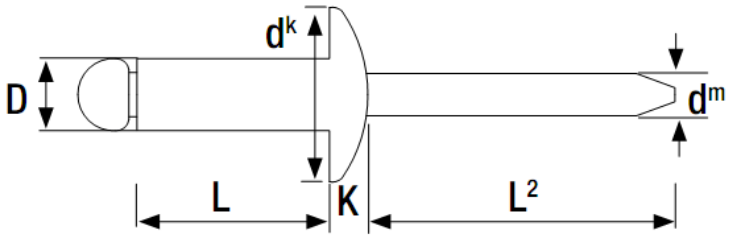



Nominal Diameter mm	Article Number	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity	Price £ Per 1000
D		L				dk	K	dm	L2				
2.4	OJCLASD2404BL	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.14
	OJCLASD2406BL	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.21
	OJCLASD2408BL	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.63
	OJCLASD2410BL	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£17.29
	OJCLASD2412BL	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£19.44
3.2	OJCLASD3204BL	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.25
	OJCLASD3206BL	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.98
	OJCLASD3208BL	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£16.54
	OJCLASD3210BL	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£17.79
	OJCLASD3212BL	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.09
	OJCLASD3214BL	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.95
	OJCLASD3216BL	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£20.96
	OJCLASD3218BL	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£22.55
	OJCLASD3220BL	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£24.20
	OJCLASD3225BL	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500	£29.03