
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 4 mm long

Supplier Part Number: OJCLASD3204WH

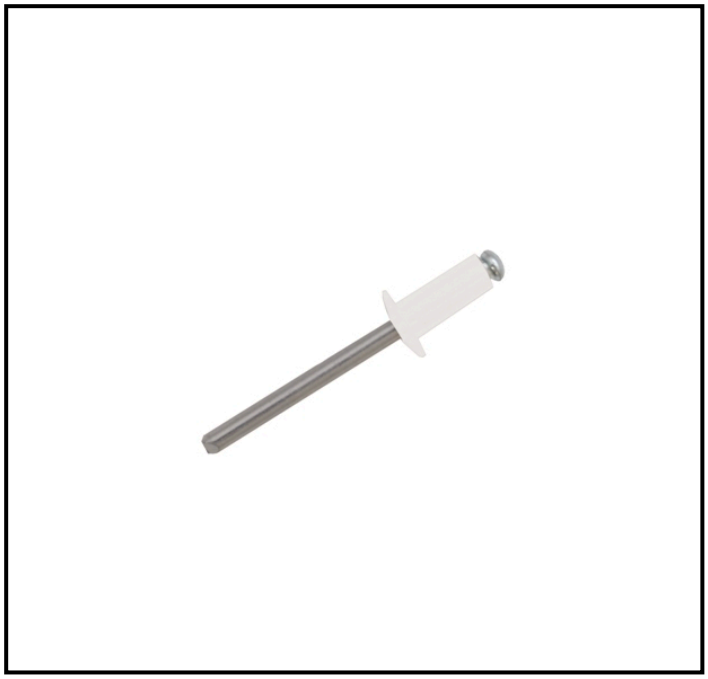

FEATURES

- **Rivet Diameter:** 3.2 mm diameter for precise fitting
- **Rivet Length:** 4 mm length suitable for a range of material thicknesses
- **Head Type:** Dome head for a smooth finish
- **Mandrel Material:** Steel mandrel for added strength
- **Rivet Body Material:** Aluminium body for lightweight and corrosion resistance
- **Grip Range:** 0.5 mm to 1.5 mm grip range for versatile application
- **Finish:** Clear trivalent chromate zinc finish for enhanced corrosion protection

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This aluminium rivet with a steel mandrel is ideal for situations where access is only available from one side of the workpiece. Its robust construction ensures reliable performance and durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	1.5 mm
Minimum Grip	0.5 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	4 mm
Shear Strength	760 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

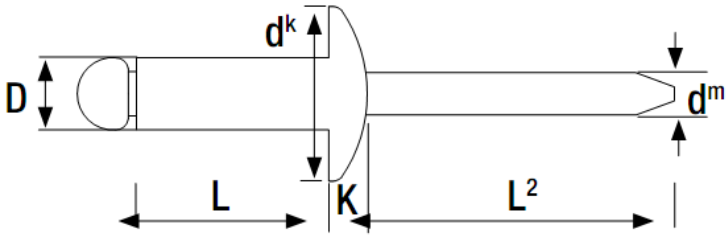



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.2	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500