
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 16 mm long

Supplier Part Number: OJCLASD3216BL

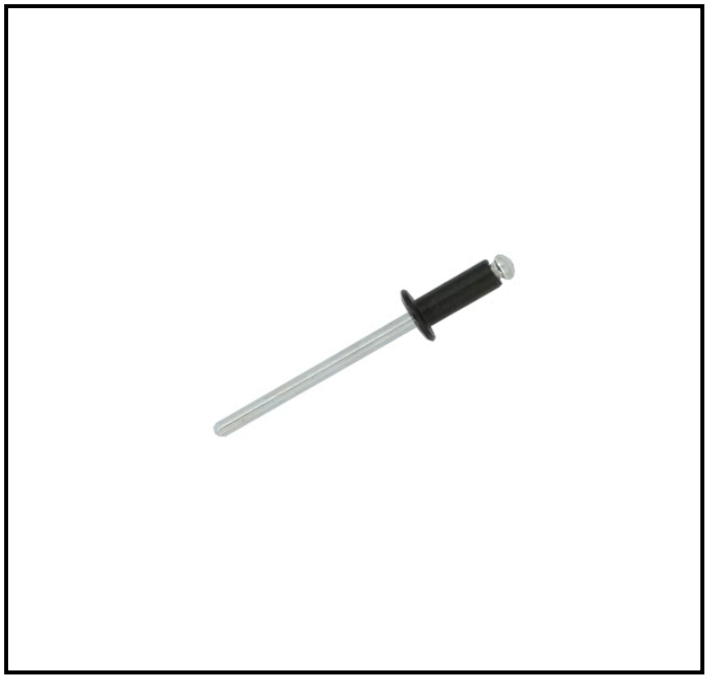

FEATURES

- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant fastening
- **Mandrel Material:** Steel for enhanced strength and durability
- **Head Type:** Dome for a neat and finished appearance
- **Finish:** Clear Trivalent Chromate Zinc for additional corrosion resistance
- **Fixing Hole Diameter:** 3.3 mm for precise fitting
- **Maximum Grip:** 12.5 mm for versatile application range
- **Minimum Grip:** 11 mm for secure fastening in thinner materials

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of materials. With a 3.2 mm diameter and 16 mm length, it provides a reliable solution for applications requiring a strong and durable joint. Ideal for use in situations where access is only possible from one side, this blind rivet ensures ease of installation and long-lasting performance.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	12.5 mm
Minimum Grip	11 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	16 mm
Shear Strength	760 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

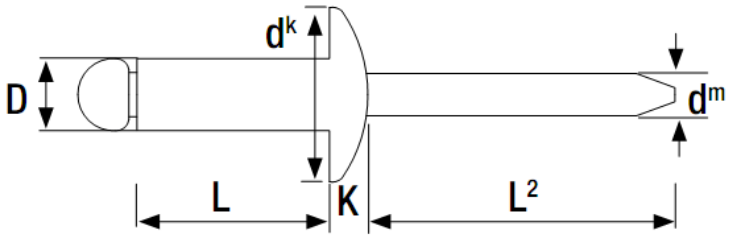



Nominal Diameter mm	Article Number	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity	Price £ Per 1000
D		L				dk	K	dm	L2				
2.4	OJCLASD2404BL	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.14
	OJCLASD2406BL	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.21
	OJCLASD2408BL	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£16.63
	OJCLASD2410BL	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£17.29
	OJCLASD2412BL	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000	£19.44
3.2	OJCLASD3204BL	4.0	0.5	1.5	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.25
	OJCLASD3206BL	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£14.98
	OJCLASD3208BL	8.0	3.5	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£16.54
	OJCLASD3210BL	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£17.79
	OJCLASD3212BL	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.09
	OJCLASD3214BL	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000	£18.95
	OJCLASD3216BL	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£20.96
	OJCLASD3218BL	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£22.55
	OJCLASD3220BL	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500	£24.20
	OJCLASD3225BL	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500	£29.03