
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 6 mm long

Supplier Part Number: OJCLASD4006WH

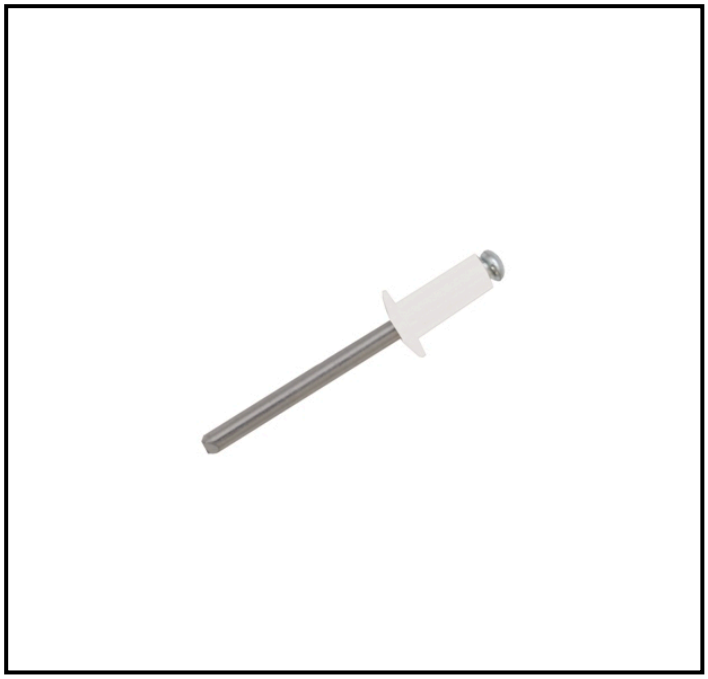

FEATURES

- **Rivet Body Material:** Aluminium: Offers lightweight yet strong fastening solutions.
- **Mandrel Material:** Steel: Provides robust support during installation.
- **Head Type:** Dome: Ensures a smooth and aesthetically pleasing finish.
- **Finish:** Trivalent Chromate Zinc: Enhances corrosion resistance for long-lasting performance.
- **Rivet Diameter:** 4 mm: Suitable for a range of standard applications.
- **Rivet Length:** 6 mm: Accommodates various material thicknesses.
- **Maximum Grip:** 3 mm: Allows for flexibility in material thickness.
- **Minimum Grip:** 1.5 mm: Ensures secure fastening even with thinner materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4 mm Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for use in construction and manufacturing, this rivet provides a reliable and durable joint, ensuring stability and strength in various assemblies.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	3 mm
Minimum Grip	1.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	6 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

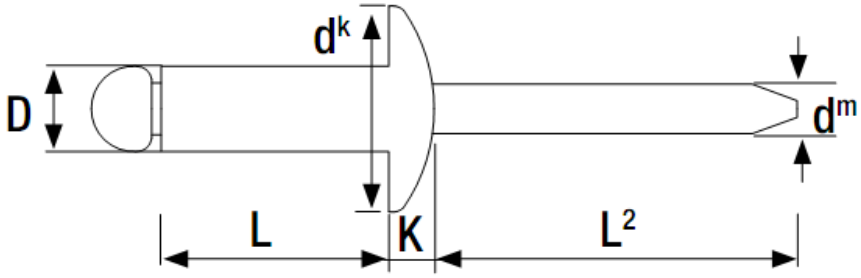



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250