
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 8 mm long

Supplier Part Number: OJCLASD4008BL

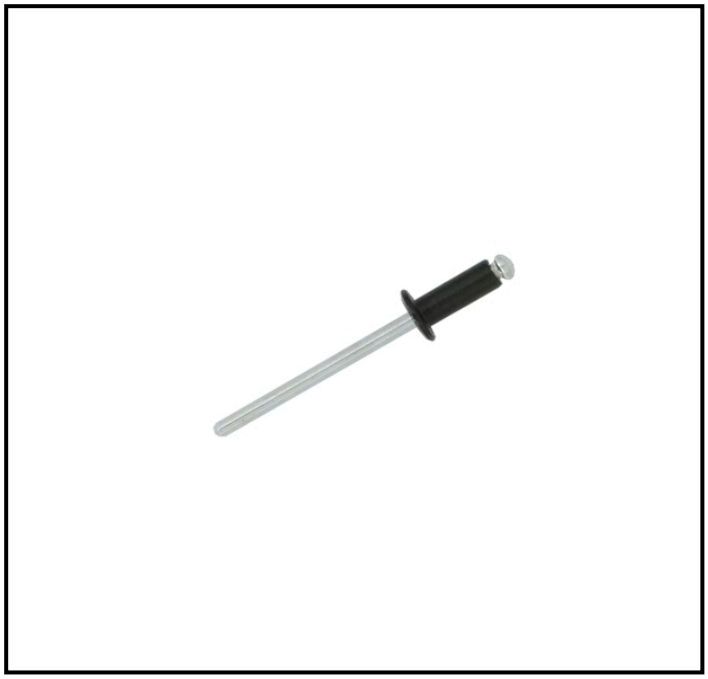

FEATURES

- **Aluminium Body:** Provides lightweight yet strong fastening.
- **Steel Mandrel:** Ensures robust and reliable installation.
- **Dome Head Type:** Offers a smooth and aesthetically pleasing finish.
- **Trivalent Chromate Finish:** Provides enhanced corrosion resistance.
- **4.1 mm Fixing Hole Diameter:** Suitable for precise and secure fitting.
- **8 mm Head Diameter:** Ensures a wide bearing surface for increased stability.
- **3 mm to 5 mm Grip Range:** Accommodates various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening applications. This 4 mm diameter rivet is constructed with an aluminium body and a steel mandrel, ensuring durability and reliability. Ideal for applications requiring a strong hold where access is only available from one side.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	5 mm
Minimum Grip	3 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	8 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

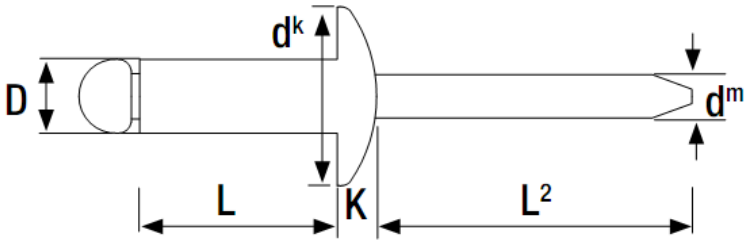



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250