
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 8 mm long

Supplier Part Number: OJCLASD4008WH

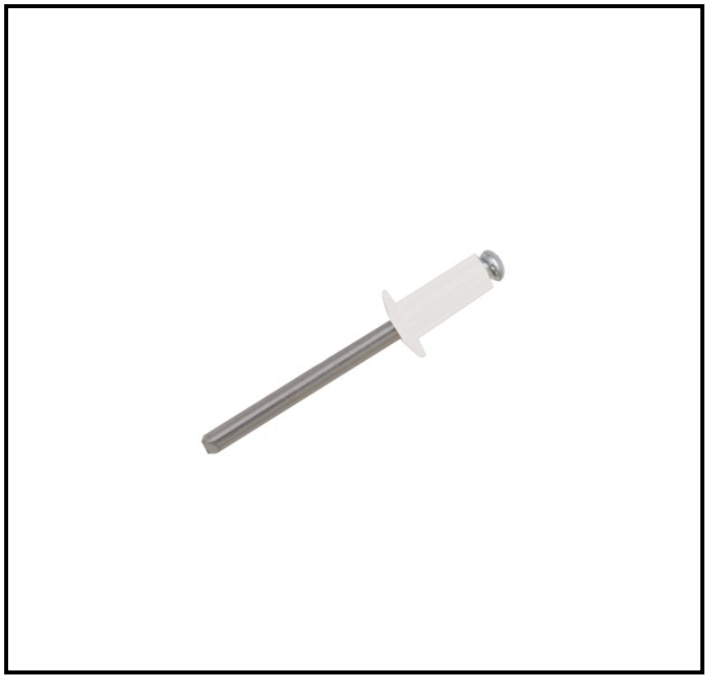

FEATURES

- **Dome Head:** Provides a smooth finish and distributes load evenly.
- **Aluminium Body:** Lightweight yet strong, suitable for various applications.
- **Steel Mandrel:** Enhances strength and ensures a secure fastening.
- **4 mm Diameter:** Fits standard holes for versatile use.
- **8 mm Length:** Suitable for materials with a grip range of 3 mm to 5 mm.
- **Trivalent Chromate Finish:** Offers corrosion resistance for longevity.
- **Compliance with DIN 7337:** Ensures adherence to quality standards.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a dome head and steel mandrel, it offers reliable performance in environments requiring strong and durable connections. Ideal for use in situations where access is only available from one side, this blind rivet ensures a firm hold with minimal effort.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	5 mm
Minimum Grip	3 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	8 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

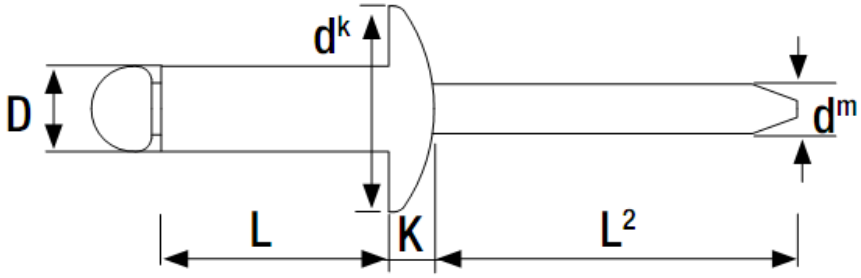



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250