
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 10 mm long

Supplier Part Number: OJCLASD4010BL

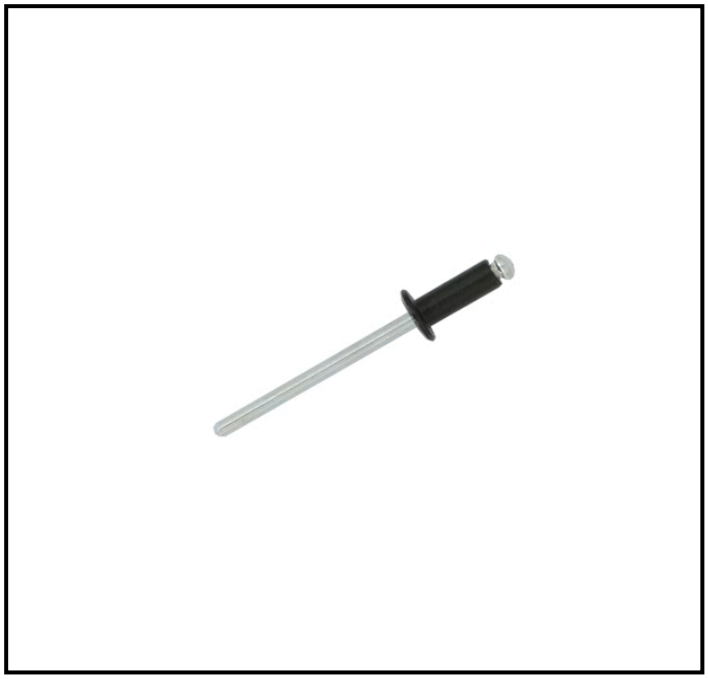

FEATURES

- **Aluminium Rivet Body:** Offers lightweight strength and resistance to corrosion.
- **Steel Mandrel:** Provides additional strength and ensures a secure fastening.
- **Dome Head Type:** Ensures a neat and flush finish for aesthetic applications.
- **Clear Trivalent Chromate Finish:** Enhances corrosion resistance and durability.
- **4 mm Rivet Diameter:** Suitable for a range of medium-duty applications.
- **10 mm Rivet Length:** Accommodates materials with a thickness range of 5 mm to 6.5 mm.
- **Compliance with DIN 7337:** Ensures adherence to industry standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only possible from one side. Ideal for use in sheet metal work, this rivet provides a reliable and strong hold, ensuring durability and stability in various industrial settings.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	6.5 mm
Minimum Grip	5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	10 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

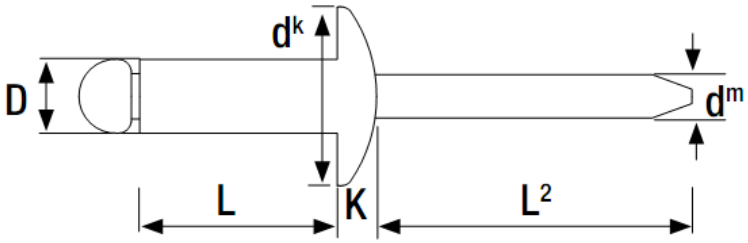



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250