
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 12 mm long

Supplier Part Number: OJCLASD4012BL

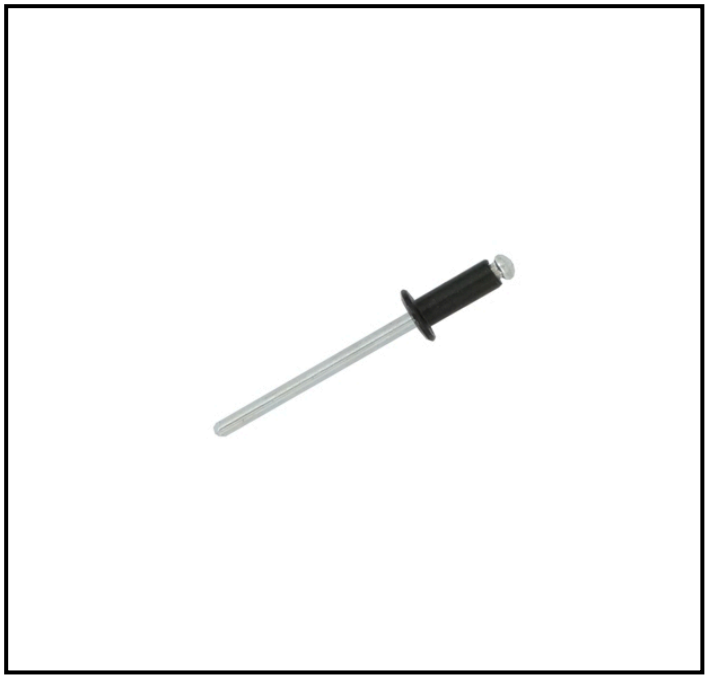

## FEATURES

- **Rivet Diameter:** 4 mm for precise fitting in standard holes
- **Rivet Length:** 12 mm to accommodate various material thicknesses
- **Head Type:** Dome for a neat and finished appearance
- **Mandrel Material:** Steel for added strength during installation
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 8.5 mm to handle thicker materials
- **Minimum Grip:** 6.5 mm for versatility in different applications
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO 4 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from durable aluminium, it offers reliable performance in a variety of industrial settings. Its main benefit is providing a strong and permanent joint without the need for welding or threading.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.1 mm |
| Mandrel Material | Steel |
| Maximum Grip | 8.5 mm |
| Minimum Grip | 6.5 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 8 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4 mm |
| Rivet Length | 12 mm |
| Shear Strength | 1200 N |
| Tensile Strength | 1600 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

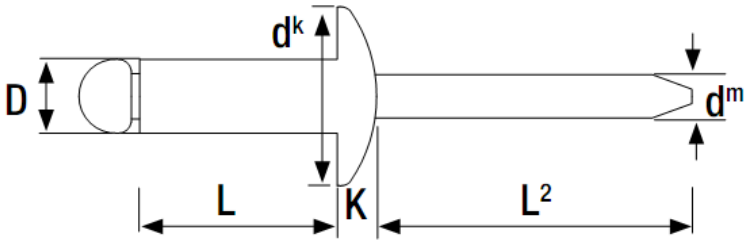

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.0 | 6.0 | 1.5 | 3.0 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 1000 |
| | 8.0 | 3.0 | 5.0 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 10.0 | 5.0 | 6.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 12.0 | 6.5 | 8.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 14.0 | 8.5 | 10.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 16.0 | 10.5 | 12.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 18.0 | 12.5 | 14.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 20.0 | 14.0 | 15.5 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 500 |
| | 25.0 | 18.0 | 20.0 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 250 |
| | 30.0 | 21.5 | 26.0 | 4.1 | 8.0 | 1.0 | 2.10 | 27.0 | 1200 | 1600 | 250 |