
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 16 mm long

Supplier Part Number: OJCLASD4016BL

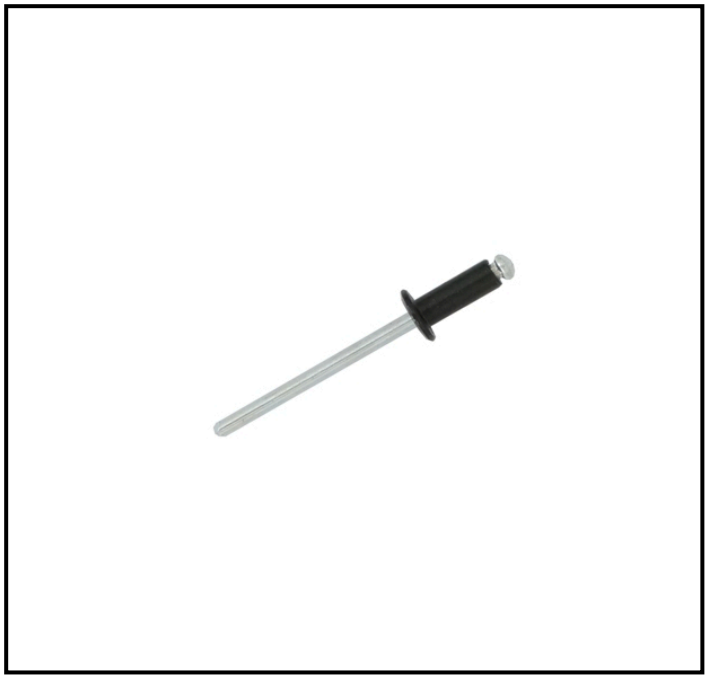

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant fastening.
- **Steel Mandrel:** Provides strong and reliable setting for secure joints.
- **Dome Head:** Ensures a neat and flush finish.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and durability.
- **Wide Grip Range:** Accommodates material thicknesses from 10.5 mm to 12.5 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of applications. With a 4 mm diameter and 16 mm length, this rivet is ideal for joining materials where access is only available from one side. Its aluminium body ensures lightweight durability, while the steel mandrel provides strong and reliable setting.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	12.5 mm
Minimum Grip	10.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	16 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

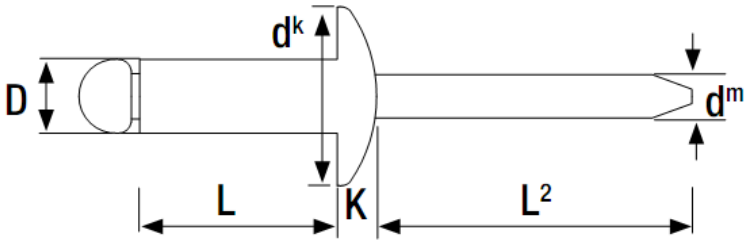



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250