
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 16 mm long

Supplier Part Number: OJCLASD4016WH

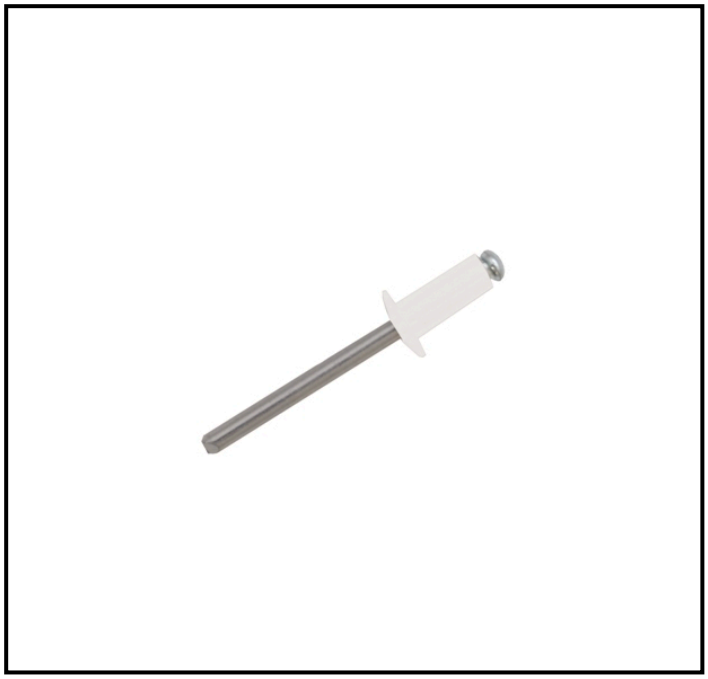

FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides robust support during installation.
- **Dome Head Type:** Ensures a neat finish and distributes load evenly.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for long-lasting performance.
- **4 mm Rivet Diameter:** Suitable for a range of applications requiring precise fastening.
- **16 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **Maximum Grip Range of 12.5 mm:** Allows for versatile use in different material combinations.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in various industrial applications. These rivets provide a reliable solution for joining materials where access is only available from one side. The aluminium body ensures lightweight durability, making them ideal for use in automotive, construction, and manufacturing sectors.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	12.5 mm
Minimum Grip	10.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	16 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

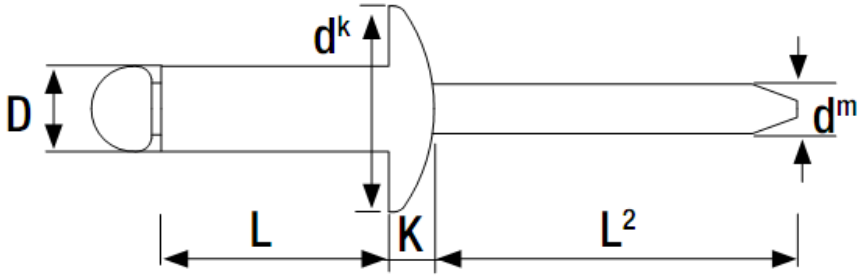



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.5	3.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	3.0	5.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	10.0	5.0	6.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.5	8.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.5	10.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.5	12.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.5	14.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250