
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 6 mm long

Supplier Part Number: OJCLASD4806BL

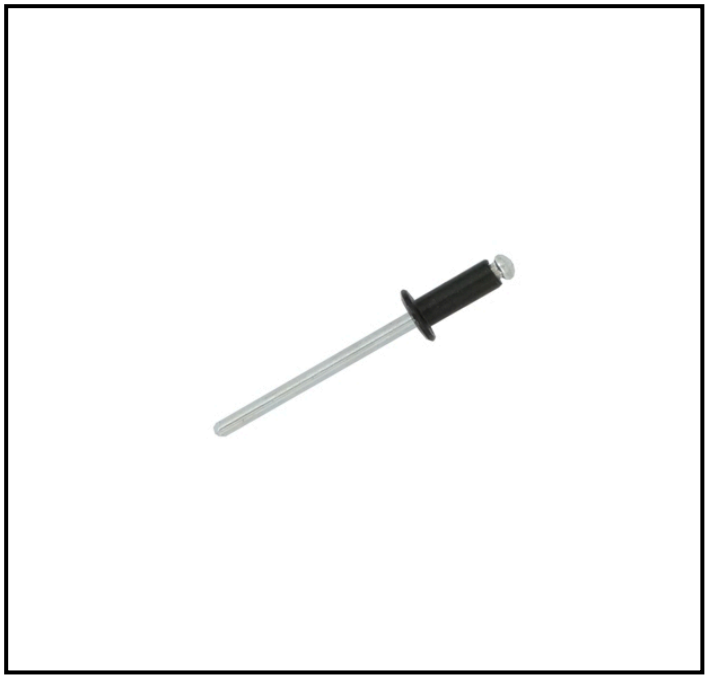

FEATURES

- **Aluminium Body:** Provides lightweight strength and corrosion resistance.
- **Steel Mandrel:** Ensures durability and reliable installation.
- **Blind Rivet Design:** Allows for fastening when access is limited to one side.
- **4.8 mm Diameter:** Suitable for a range of applications requiring medium-sized rivets.
- **6 mm Length:** Accommodates materials with varying thicknesses.
- **Trivalent Chromate Finish:** Offers enhanced corrosion protection.
- **Compliance with DIN 7337:** Meets international standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in applications where access is limited to one side of the workpiece. These rivets are ideal for joining materials such as metal, plastic, and wood, providing a reliable and permanent hold. The aluminium body ensures lightweight strength, while the steel mandrel offers durability during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	2.5 mm
Minimum Grip	1 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	6 mm
Shear Strength	1700 N
Tensile Strength	2250 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

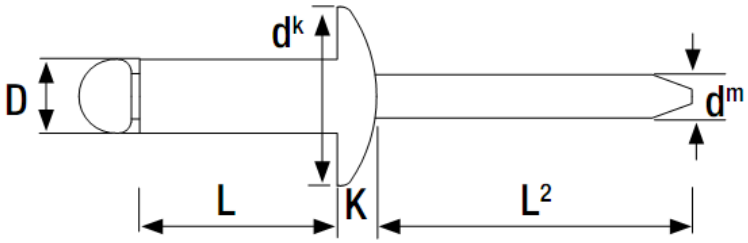



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	6.0	1.0	2.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	8.0	2.5	4.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	10.0	4.0	6.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	12.0	6.0	8.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	14.0	8.0	10.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	16.0	10.0	12.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	18.0	12.0	14.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	20.0	14.0	16.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	22.0	16.0	18.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	25.0	18.0	21.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	28.0	21.0	23.5	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	30.0	23.0	25.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	35.0	25.0	30.0	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	40.0	30.0	35.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150