
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 6 mm long

Supplier Part Number: OJCLASD4806WH

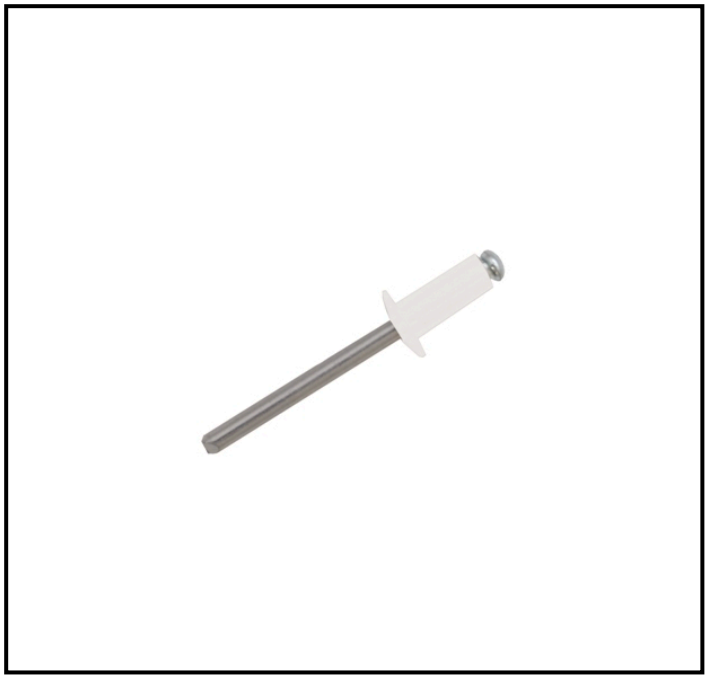

## FEATURES

- **Rivet Body Material:** Aluminium for lightweight and corrosion-resistant fastening
- **Mandrel Material:** Steel for enhanced strength and durability
- **Head Type:** Dome for a neat and finished appearance
- **Finish:** Trivalent Chromate Zinc for additional corrosion protection
- **Rivet Diameter:** 4.8 mm for compatibility with a wide range of applications
- **Rivet Length:** 6 mm suitable for materials with a thickness between 1 mm and 2.5 mm
- **Fixing Hole Diameter:** 4.9 mm for easy installation

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in applications where access is limited to one side. These rivets are ideal for creating strong, reliable joints in various materials, offering excellent resistance to vibration and corrosion.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 2.5 mm |
| Minimum Grip | 1 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 6 mm |
| Shear Strength | 1700 N |
| Tensile Strength | 2250 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

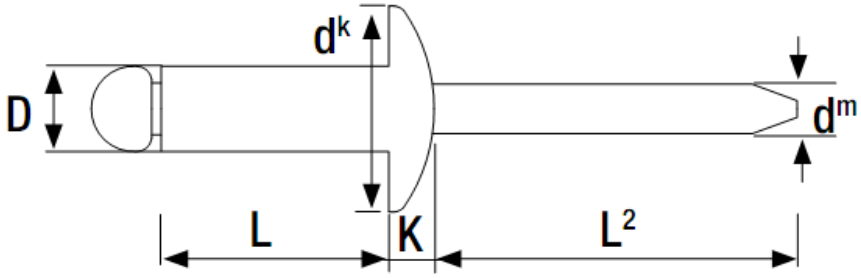

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.8 | 6.0 | 1.0 | 2.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 8.0 | 2.5 | 4.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 10.0 | 4.0 | 6.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 12.0 | 6.0 | 8.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 14.0 | 8.0 | 10.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 16.0 | 10.0 | 12.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 18.0 | 12.0 | 14.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 20.0 | 14.0 | 16.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 22.0 | 16.0 | 18.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 25.0 | 18.0 | 21.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 28.0 | 21.0 | 23.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 30.0 | 23.0 | 25.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 35.0 | 25.0 | 30.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 200 |
| | 40.0 | 30.0 | 35.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 150 |