
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 8 mm long

Supplier Part Number: OJCLASD4808BL

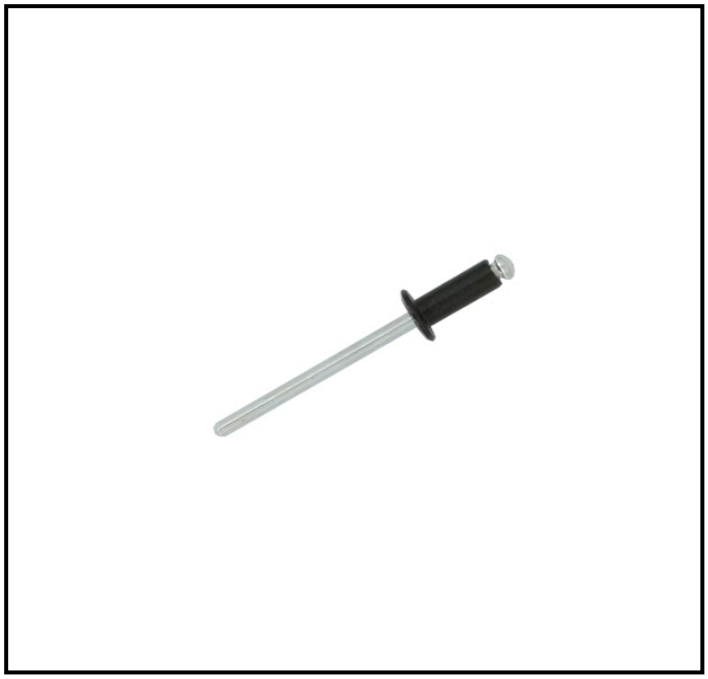

## FEATURES

- **Rivet Diameter:** 4.8 mm for robust fastening
- **Rivet Length:** 8 mm suitable for a range of material thicknesses
- **Head Type:** Dome for a neat finish
- **Mandrel Material:** Steel for added strength
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Maximum Grip:** 4 mm for versatile use
- **Minimum Grip:** 2.5 mm for flexibility in application

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This aluminium rivet is ideal for situations where access is only available from one side, providing a reliable and durable solution.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 4 mm |
| Minimum Grip | 2.5 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 8 mm |
| Shear Strength | 1700 N |
| Tensile Strength | 2250 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

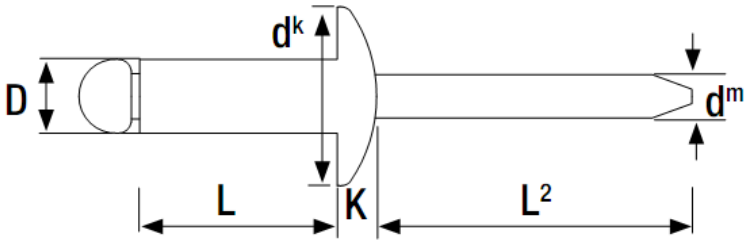

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.8 | 6.0 | 1.0 | 2.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 8.0 | 2.5 | 4.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 10.0 | 4.0 | 6.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 12.0 | 6.0 | 8.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 14.0 | 8.0 | 10.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 16.0 | 10.0 | 12.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 18.0 | 12.0 | 14.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 20.0 | 14.0 | 16.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 22.0 | 16.0 | 18.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 25.0 | 18.0 | 21.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 28.0 | 21.0 | 23.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 30.0 | 23.0 | 25.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 35.0 | 25.0 | 30.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 200 |
| | 40.0 | 30.0 | 35.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 150 |