
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 12 mm long

Supplier Part Number: OJCLASD4812BL

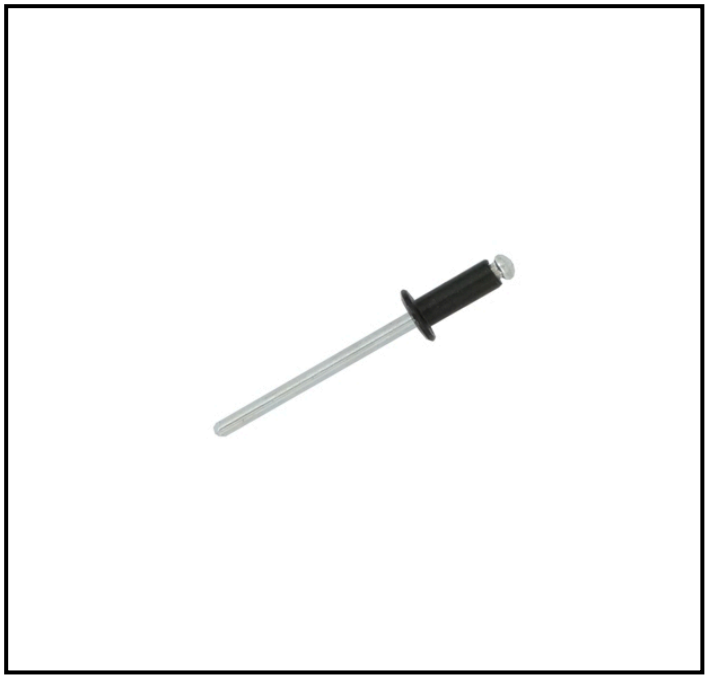

## FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant fastening.
- **Steel Mandrel:** Provides strong and reliable support during installation.
- **Blind Rivet Design:** Allows for fastening when access is restricted to one side.
- **Dome Head Type:** Ensures a neat and finished appearance.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer-lasting performance.
- **Wide Grip Range:** Accommodates material thicknesses from 6 mm to 8 mm.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 4.8 mm diameter and 12 mm length, it is ideal for joining materials where access is only available from one side. The aluminium body ensures lightweight durability, while the steel mandrel provides robust support.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 8 mm |
| Minimum Grip | 6 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 12 mm |
| Shear Strength | 1700 N |
| Tensile Strength | 2250 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

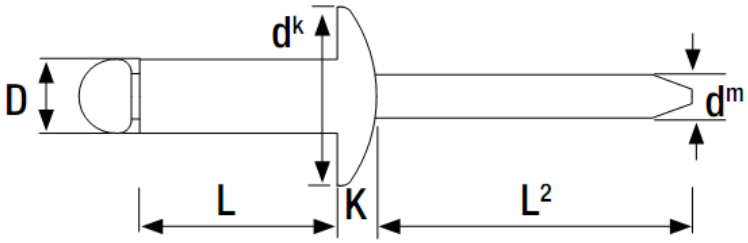

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.8 | 6.0 | 1.0 | 2.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 8.0 | 2.5 | 4.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 10.0 | 4.0 | 6.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 12.0 | 6.0 | 8.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 14.0 | 8.0 | 10.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 500 |
| | 16.0 | 10.0 | 12.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 18.0 | 12.0 | 14.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 20.0 | 14.0 | 16.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 22.0 | 16.0 | 18.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 25.0 | 18.0 | 21.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 28.0 | 21.0 | 23.5 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 30.0 | 23.0 | 25.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 250 |
| | 35.0 | 25.0 | 30.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 200 |
| | 40.0 | 30.0 | 35.0 | 4.9 | 9.5 | 1.1 | 2.70 | 28.0 | 1700 | 2250 | 150 |