
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 18 mm long

Supplier Part Number: OJCLASD4818BL

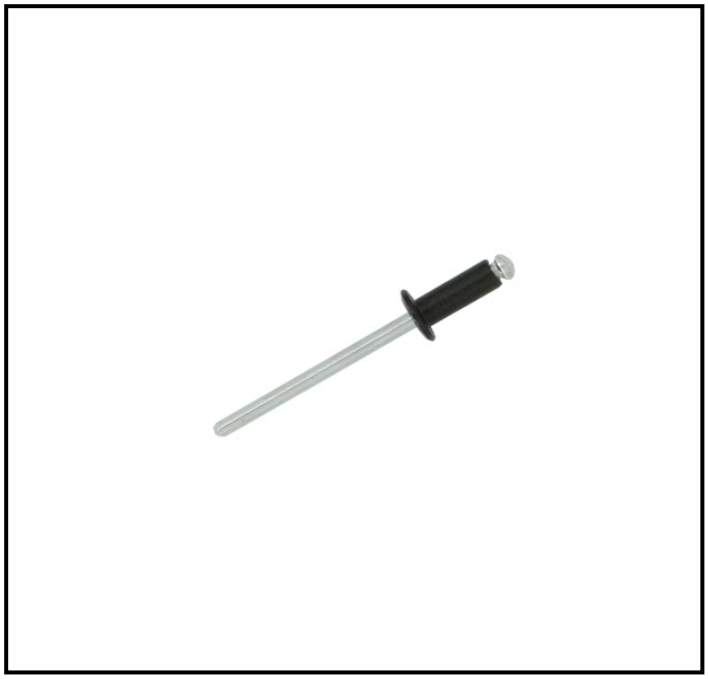

FEATURES

- **Rivet Body Material:** Aluminium provides lightweight and corrosion-resistant fastening.
- **Mandrel Material:** Steel ensures robust and reliable setting of the rivet.
- **Rivet Diameter:** 4.8 mm diameter for compatibility with a range of hole sizes.
- **Rivet Length:** 18 mm length accommodates different material thicknesses.
- **Head Type:** Dome head for a smooth and aesthetically pleasing finish.
- **Finish:** Clear trivalent chromate zinc finish for enhanced corrosion resistance.
- **Maximum Grip:** 14 mm grip range for versatile application.
- **Minimum Grip:** 12 mm grip range ensures secure fastening.
- **Fixing Hole Diameter:** 4.9 mm for precise installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Blind Rivet is designed for secure fastening in various industrial applications. Made from durable aluminium with a steel mandrel, it offers reliable performance in environments where access is limited to one side of the workpiece. Ideal for applications requiring a strong and permanent joint.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	14 mm
Minimum Grip	12 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	18 mm
Shear Strength	1700 N
Tensile Strength	2250 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

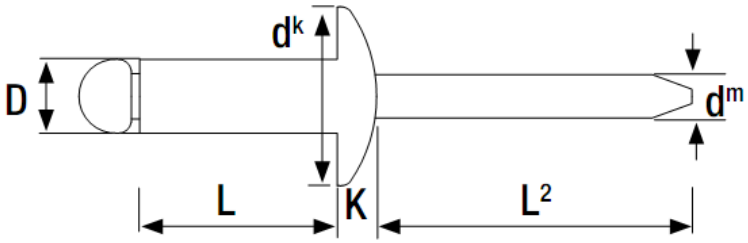



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	6.0	1.0	2.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	8.0	2.5	4.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	10.0	4.0	6.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	12.0	6.0	8.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	14.0	8.0	10.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	16.0	10.0	12.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	18.0	12.0	14.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	20.0	14.0	16.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	22.0	16.0	18.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	25.0	18.0	21.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	28.0	21.0	23.5	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	30.0	23.0	25.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	35.0	25.0	30.0	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	40.0	30.0	35.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150