
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJCLASDM4815GG

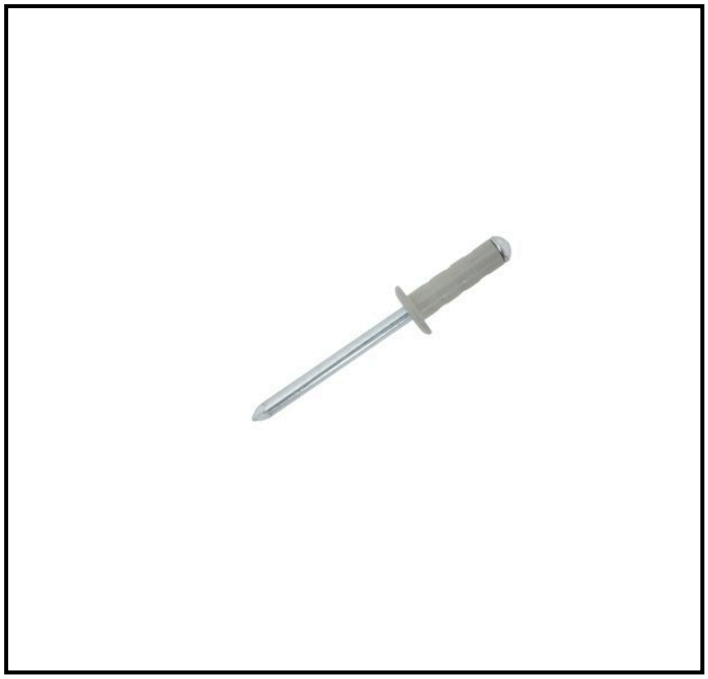

## FEATURES

- **Dome Head:** Ensures a neat and flush finish.
- **Aluminium Body:** Offers corrosion resistance and lightweight properties.
- **Steel Mandrel:** Provides strength and reliability during installation.
- **4.8 mm Diameter:** Suitable for a range of applications.
- **15 mm Length:** Accommodates materials with varying thicknesses.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.
- **Maximum Grip of 10 mm:** Suitable for thicker materials.
- **Minimum Grip of 5 mm:** Versatile for different material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of applications. With a dome head and a steel mandrel, this rivet offers reliable performance in joining materials where access is only available from one side. Ideal for use in construction and manufacturing, it provides a strong and durable hold.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.9 mm |
| Mandrel Material | Steel |
| Maximum Grip | 10 mm |
| Minimum Grip | 5 mm |


## Mechanical Specifications

| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 15 mm |
| Shear Strength | 1500 N |
| Tensile Strength | 2350 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Additional Image 1

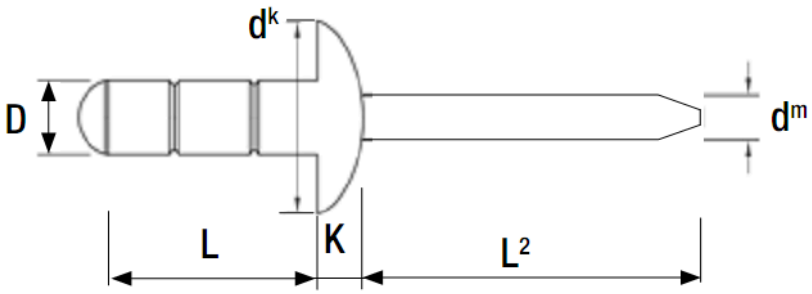




| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 4.8 | 15.0 | 5.0 | 10.0 | 4.9 | 9.5 | 2.0 | 2.78 | 28.0 | 1500 | 2350 | 500 |