
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJCLASDM4815MG

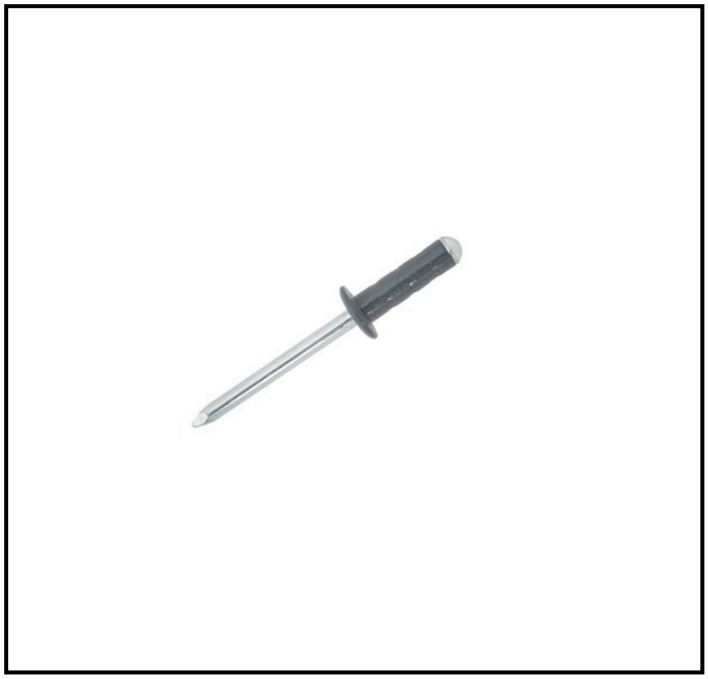

FEATURES

- **Aluminium Body:** Provides lightweight strength and corrosion resistance.
- **Steel Mandrel:** Ensures strong and reliable fastening.
- **Dome Head Type:** Offers a smooth and aesthetically pleasing finish.
- **4.8 mm Diameter:** Suitable for a wide range of applications.
- **15 mm Length:** Accommodates materials with varying thicknesses.
- **Clear Trivalent Chromate Finish:** Enhances corrosion resistance.
- **Maximum Grip of 10 mm:** Allows for versatile use in different material thicknesses.
- **Minimum Grip of 5 mm:** Ensures secure fastening even in thinner materials.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. Ideal for use in construction and manufacturing, this rivet provides a reliable and durable connection. Its aluminium body ensures lightweight strength, while the steel mandrel offers robust support.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	10 mm
Minimum Grip	5 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	15 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

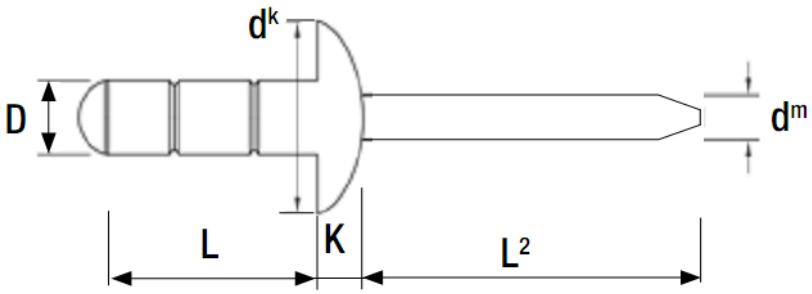



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500