
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 15 mm long

Supplier Part Number: OJCLASDM48150G

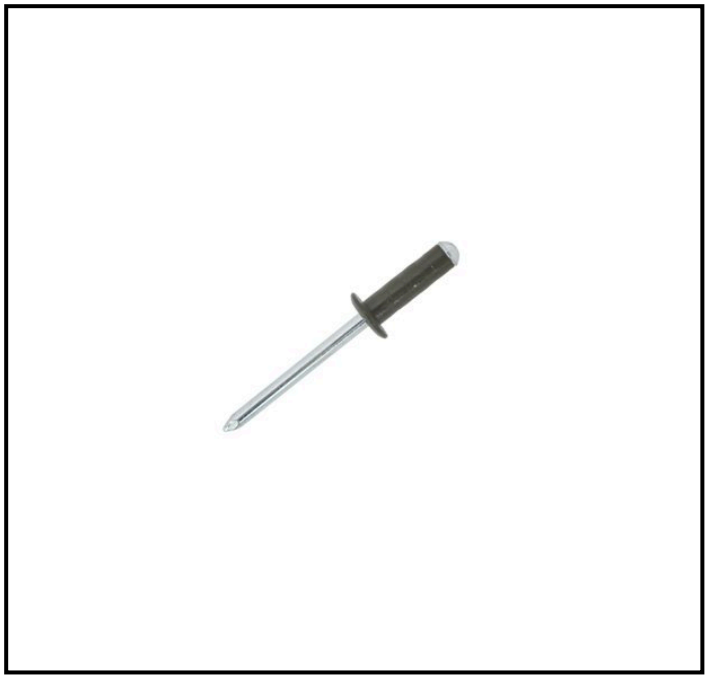

FEATURES

- **Aluminium Body:** Provides lightweight strength and corrosion resistance.
- **Steel Mandrel:** Ensures reliable fastening with high tensile strength.
- **Dome Head:** Offers a smooth finish for aesthetic applications.
- **Wide Grip Range:** Accommodates material thicknesses from 5 mm to 10 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for longer-lasting performance.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of applications. With a 4.8 mm diameter and a 15 mm length, this rivet is ideal for joining materials where access is only available from one side. Its aluminium body ensures lightweight durability, making it suitable for both industrial and commercial use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	10 mm
Minimum Grip	5 mm


Mechanical Specifications

Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	15 mm
Shear Strength	1500 N
Tensile Strength	2350 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

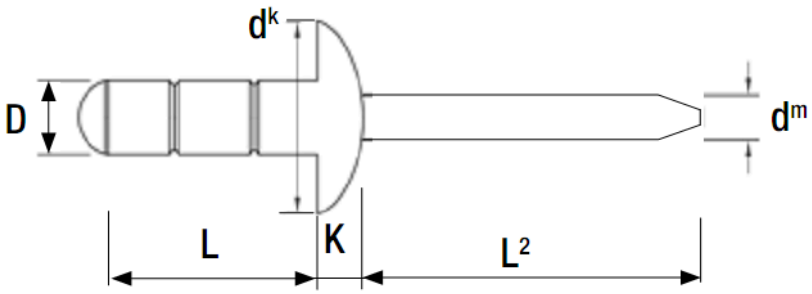



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500