
RS PRO Aluminium/Steel Flange Head Blind Rivet, 3.2 mm Diameter x 10 mm long

Supplier Part Number: OJCLASL3210BL

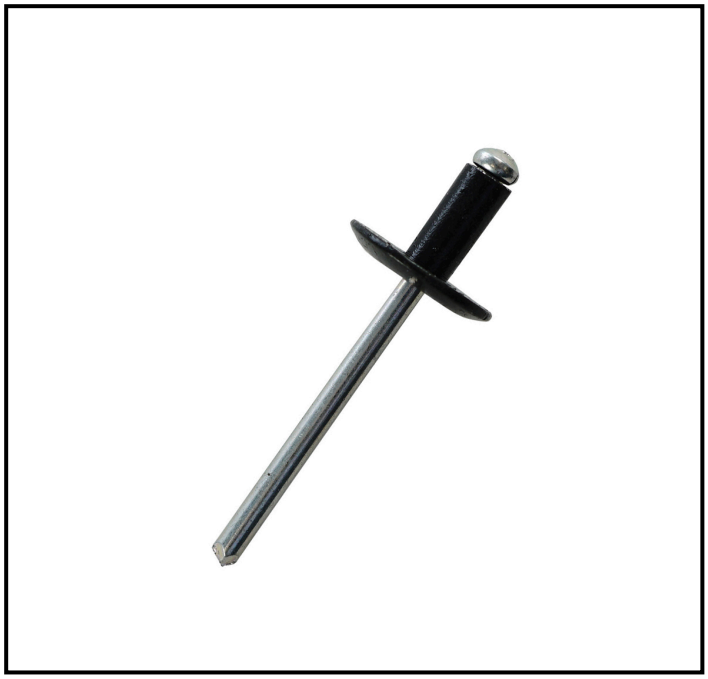

FEATURES

- **Rivet Diameter:** 3.2 mm diameter for precise fitting
- **Rivet Length:** 10 mm length suitable for a range of material thicknesses
- **Head Type:** Flange head for increased load distribution
- **Mandrel Material:** Steel mandrel for enhanced strength
- **Finish:** Clear trivalent chromate zinc finish for corrosion resistance
- **Grip Range:** 5 mm to 7 mm grip range for versatile applications
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. Made from durable aluminium, this rivet ensures a strong and reliable hold, ideal for various industrial and construction environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Flange
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	7 mm
Minimum Grip	5 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	10 mm
Shear Strength	740 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

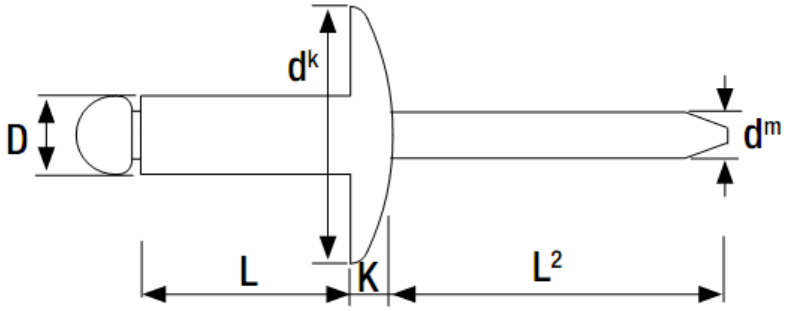



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	3.5	5.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	5.0	7.0	3.3	9.5	2.0	1.70	26.0	740	980	500
4.0	8.0	2.0	4.0	3.3	9.5	2.0	1.70	26.0	740	980	500
	10.0	4.0	6.0	4.1	12.0	2.0	2.10	27.0	1180	1600	500
	12.0	6.0	8.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
	14.0	8.0	10.0	4.1	12.0	2.5	2.10	27.0	1180	1600	500
4.8	10.0	3.5	5.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	12.0	5.5	7.5	4.1	12.0	2.5	2.10	27.0	1180	1600	250
	14.0	7.5	9.5	4.9	16.0	.	2.70	28.0	1540	2230	200
	16.0	9.0	11.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	18.0	11.0	13.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	20.0	13.0	15.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	24.0	17.0	19.0	4.9	16.0	.	2.70	28.0	1540	2230	200
	26.0	19.5	21.0	4.9	16.0	.	2.70	28.0	1540	2230	150